
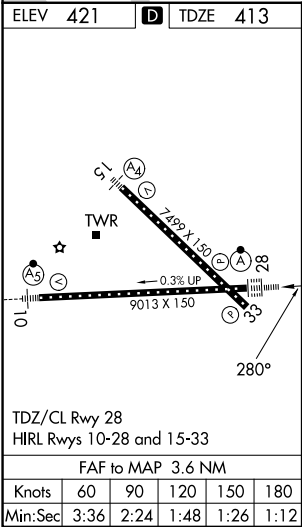


LOC/DME I-SYR 109.9 Chan 36	APP CRS 280°	Rwy Ldg TDZE Apt Elev	9013 413 421
---	------------------------	-----------------------------	---

ILS or LOC RWY 28
SYRACUSE HANCOCK INTL (SYR)

DME or RADAR required.		ALSf-2	MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct SYR VORTAC and hold, continue climb-in-hold to 3000.
ATIS 124.225	SYRACUSE APP CON 126.125 269.125	SYRACUSE TOWER 120.3 239.0	GND CON 121.7 348.6

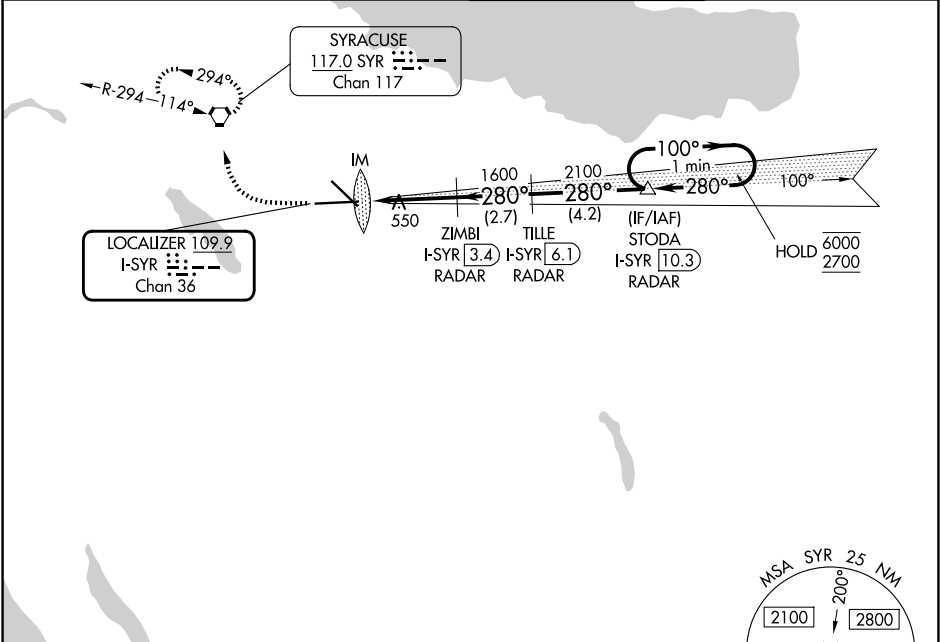

1100 ↑	3000 ↗	SYR 	*LOC only		STODA I-SYR [10.3] RADAR		One Minute Holding Pattern		
I-SYR DME ANTENNA			ZIMBI I-SYR [3.4] RADAR	TILLE I-SYR [6.1] RADAR					
IM			1600		280°		100° → 6000 ← 280° 2700		
I-SYR [0.2]			*I-SYR [0.9]		2100		GS 3.00° TCH 60		
0.2			0.9		2.5 NM		2.7 NM		
4.2 NM									
CATEGORY		A		B		C		D	
S-ILS 28				613/18		200 (200-½)			
S-LOC 28		800/24		387 (400-½)		800/35		387 (400-¾)	
CIRCLING		900-1 479 (500-1)		920-1 499 (500-1)		1020-1½ 599 (600-1½)		1180-2½ 759 (800-2½)	