

WAAS CH 65925 W18A	APP CRS 179°	Rwy Ldg TDZE Apt Elev	5001 275 279
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

WALNUT RIDGE RGNL (ARG)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV DA to 529 feet, LNAV/VNAV DA to 579 feet, and all MDAs 60 feet; increase Circling Cat D visibility ¼ SM. For inoperative ODALS, increase LPV all Cats and LNAV/VNAV all Cats visibility to ¾ mile and LNAV Cat C and D visibility to 1 mile. Baro-VNAV and VDP NA with Jonesboro altimeter setting.

ODALS

MISSED APPROACH:

Climb to 3100 direct GUBFO and hold.

AWOS-3PT 126.525	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF)
----------------------------	--	-------------------------------

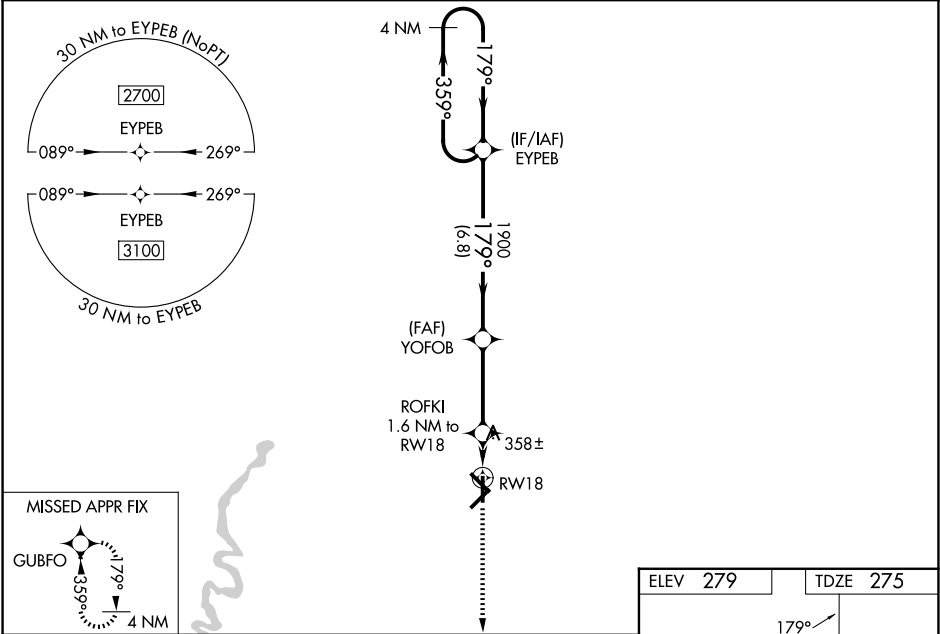

4 NM Holding Pattern		EYEB	YOFOB	ROFKI 1.6 NM to RWY 18	3100	GUBFO
2700 ← 359°		179° →		179°	1900	*LNAV only.
GP 3.00° TCH 45		6.8 NM		3.4 NM	0.6 NM	1 NM
CATEGORY	A	B	C	D		
LPV DA	475-¾		200 (200-¾)			
LNAV/VNAV DA	525-¾		250 (300-¾)			
LNAV MDA	620-¾	345 (400-¾)	620-⅞	345 (400-⅞)		
CIRCLING	760-1	481 (500-1)	800-1½ 521 (600-1½)	1000-2¼ 721 (800-2¼)		

