

HI-ILS or LOC RWY 20

LOC I-BAF 111.9	APCH CRS 204°	Rwy Idg 8919 TDZE 270 Arpt Elev 270	[USAF]	WESTFIELD-BARNES RGNL (KBAF)
DME required			MALSR	
▼**When ALS inop, increase CAT CDE RVR 40. ▼**When ALS inop, increase CAT CDE vis to 1½ miles. ***When ALS inop, increase CAT CDE RVR 45.			MISSED APPROACH: Climb to 1300, then climbing right turn to 4000 direct CTR VOR/DME and hold, continue climb-in-hold to 4000. (TACAN a/c climb to 1300, then climbing right turn to 4000 via hdg 010° and BAF VORTAC R-321 to RITAS/BAF 16 DME and hold).	

ATIS 127.1 263.15	BRADLEY APP CON 125.35 281.5	WESTFIELD TOWER ★ 125.075 (CTAF) 0 251.1	GND CON 121.7 289.4
--	---	---	--




***** When ALS inop, increase CAT CDE vis to 13¼ miles.

Circling Rwy 02, 15 not authorized at night.

DME from BAF VORTAC. DME use requires simultaneous reception of I-BAF and BAF DME.

VDP not authorized when using BDL altimeter setting.

TACAN MISSED APCH FIX

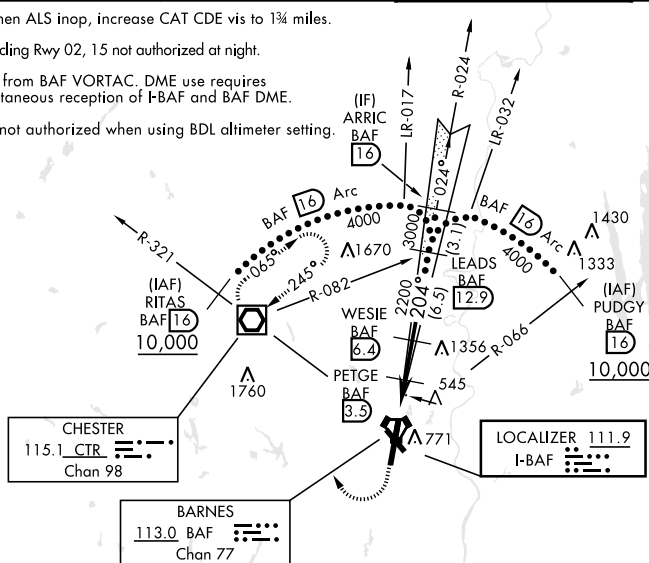

EMERG SAFE ALT 100 NM 6500

