

WICHITA, KANSAS

RNAV (RNP) Z RWY 19R

APCH CRS	Rwy Idg	12,000
188°	TDZE	1372
	Arpt Elev	1372

(USAF)


MC CONNELL AFB (KIAB)

RNP AR APCH-GPS	ALSIF-1	MISSED APPROACH: Climb to 4000 direct HOKET and hold as published. Expect further clearance from ATC.
▼ * When ALS inop, increase vis to 1 1/4 miles. ** When ALS inop, increase vis to 1 3/8 miles.		


D-ATIS 124.65 269.9	WICHITA APP CON 134.8 269.1	TOWER 127.25 291.775	GND CON 118.0 275.8
------------------------	--------------------------------	-------------------------	------------------------

For uncompensated Baro-VNAV systems, procedure not authorized below -17°C. or above 54°C.

AUTHORIZATION REQUIRED

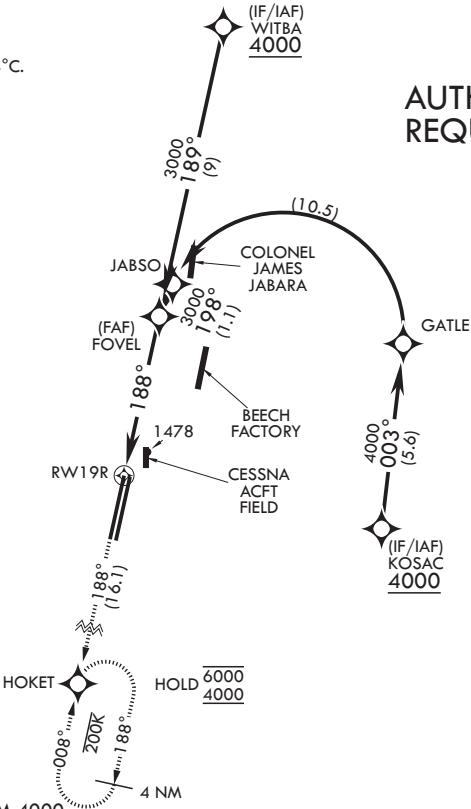

RADAR required for holding above 5000 or above 230 KIAS



EMERG SAFE ALT 100 NM 4000

	See planview for multiple IF locations		ELEV 1372	TDZE 1372
4000 tr 188°		3000		
RW19R		3000		
	188°			
	4.9 NM			
CATEGORY	A	B	C	D
RNP 0.10 DA*	1798/40	426	(500-3/4)	
RNP 0.30 DA**	1844/50	472	(500-1)	