

|                                        |                        |                                                                          |
|----------------------------------------|------------------------|--------------------------------------------------------------------------|
| WAAS<br>CH <b>70714</b><br><b>W23A</b> | APP CRS<br><b>233°</b> | Rwy Ldg<br>TDZE<br>Apt Elev<br><b>5590</b><br><b>5505</b><br><b>5507</b> |
|----------------------------------------|------------------------|--------------------------------------------------------------------------|

RNAV (GPS) RWY 23

FOUR CORNERS RGNL (FMN)


RNP APCH - GPS.

⚠

Baro-VNAV and VDP NA when using Durango altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA for Cat D southeast of Rwy 5 and south of Rwy 25. When local altimeter setting not received, use Durango altimeter setting and increase LPV DA to 5998 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 6274 feet and all visibilities 1 SM. Increase all MDAs 260 feet and LNAV visibilities Cat B ¼ SM, C/D ⅓ SM and Circling visibility Cat A/B ¼ SM and Cat C ½ SM.

MISSED APPROACH: Climb to 8000 direct EXZAR and on track 265° to HASIT and hold.

|                       |                                       |                                                |                         |                         |
|-----------------------|---------------------------------------|------------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>127.15</b> | DENVER CENTER<br><b>118.575 348.7</b> | FARMINGTON TOWER*<br><b>118.9 (CTAF) 257.8</b> | GND CON<br><b>121.7</b> | UNICOM<br><b>122.95</b> |
|-----------------------|---------------------------------------|------------------------------------------------|-------------------------|-------------------------|

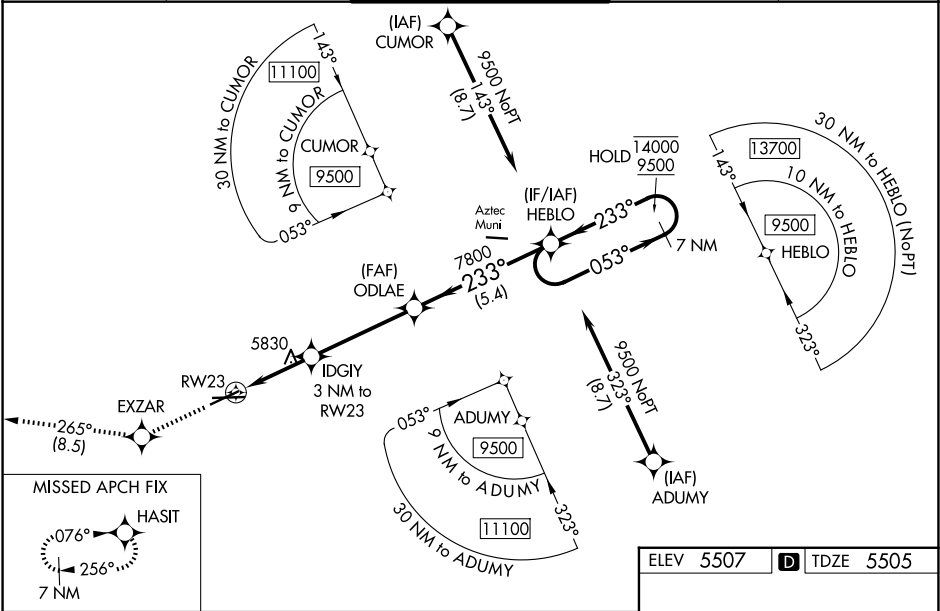

|              |                       |                       |                         |                       |                |                      |
|--------------|-----------------------|-----------------------|-------------------------|-----------------------|----------------|----------------------|
| 8000         | EXZAR                 | tr 265°               | HASIT                   | ODLAE                 | HEBLO          | 7 NM Holding Pattern |
|              |                       |                       |                         | 7800                  | 7800           | 14000<br>9500        |
|              |                       |                       |                         | 6500                  |                | GP 3.00°<br>TCH 42   |
|              |                       |                       |                         | 2 NM to RWY 23        | 1 NM to RWY 23 |                      |
|              |                       |                       |                         | 4.1 NM                | 5.4 NM         |                      |
| CATEGORY     | A                     | B                     | C                       | D                     |                |                      |
| LPV DA       |                       | 5755-¾                | 250 (300-¾)             |                       |                |                      |
| LNAV/VNAV DA |                       | 6031-1½               | 526 (600-1½)            |                       |                |                      |
| LNAV MDA     | 6080-1                | 575 (600-1)           | 6080-1½                 | 575 (600-1½)          |                |                      |
| CIRCLING     | 6100-1<br>593 (600-1) | 6140-1<br>633 (700-1) | 6380-2½<br>873 (900-2½) | 6400-3<br>893 (900-3) |                |                      |

