

HI-ILS or LOC Z RWY 19

LOC I-MXJ <u>108.5</u>	APCH CRS 190°	Rwy Idg 12,400 TDZE 871 Arpt Elev 871
----------------------------------	-------------------------	--

[USAF]

WHITEMAN AFB (KSZL)

RADAR or DME required

T *When ALS inop, increase CAT CDE RVR to 40 and vis to $\frac{3}{4}$ mile.

** When ALS inop, increase CAT CDE vis to 1¼ miles.


*** Circling not authorized W of Rwy 1-19.

ALSF-1




MISSED APPROACH: Climb to 3000 via SZL TACAN R-184 to CALEB and hold.


ATIS ★	APP CON ★	TOWER ★	GND CON ★	ASR
118.725 239.025	127.45 284.0	132.4 318.8	119.125 275.8	

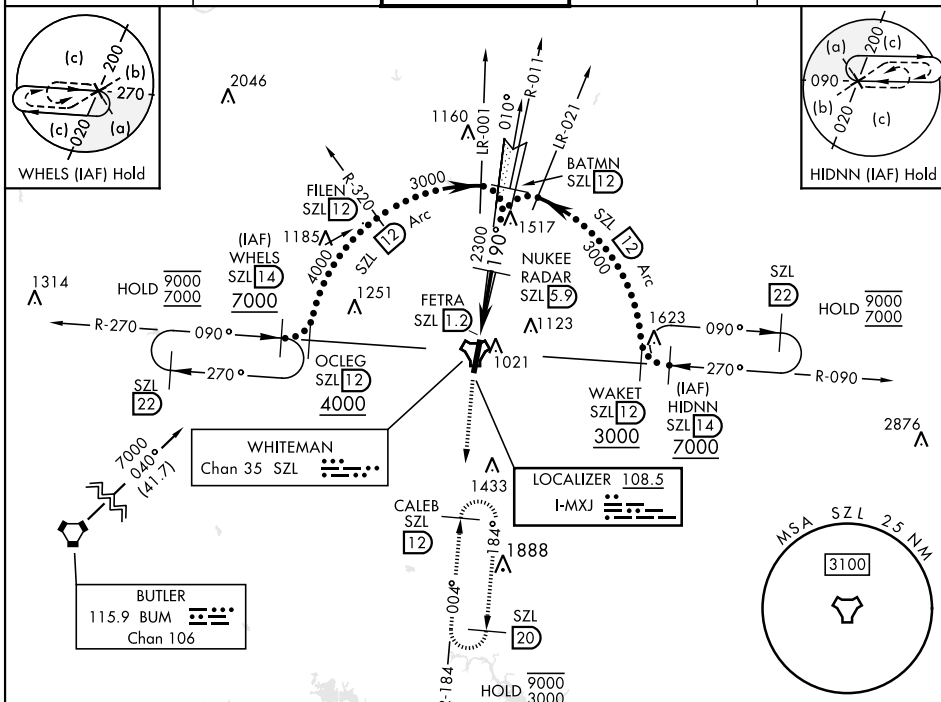

EMERG SAFE ALT 100 NM 4700

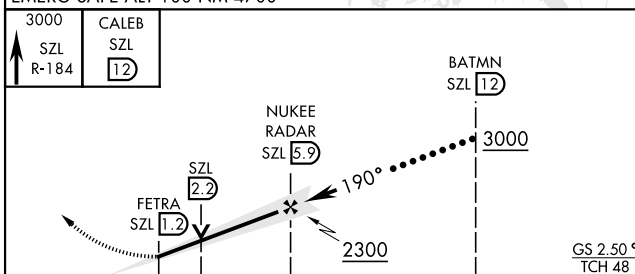

	0.5 NM	4.7 NM		
CATEGORY	C	D	E	
S-ILS 19 *	1071/24	200	(200-½)	
S-LOC 19 **	1300/40	429	(500-¾)	
CIRCLING***	1340-1½ 469 (500-1½)	1440-2 569 (600-2)	1460-2 589 (600-2)	

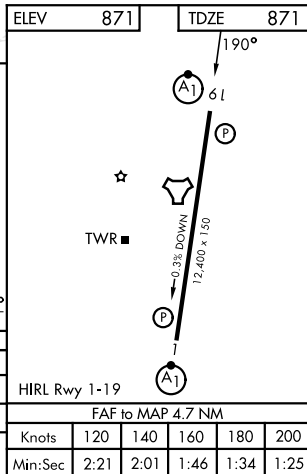

HI-ILS or LOC Z RWY 19