

WAAS CH 90405 W22A	APP CRS 219°	Rwy Ldg TDZE 2880 Apt Elev 2885
--	------------------------	---

RNAV (GPS) RWY 22

LIBERAL MID-AMERICA RGNL (L.B.L.)

RNP APCH - GPS.



▼

⚠

Circling NA east of Rwy 17-35. Baro-VNAV and VDP NA when using GUY altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use GUY altimeter setting and increase LPV DA to 3192 feet; Increase LNAV/VNAV DA to 3280 feet and all visibilities ½ SM. Increase all MDAs 120 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 4800 direct PERDE and hold.

AWOS-3PT 118.375	KANSAS CITY CENTER 134.0 257.625	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

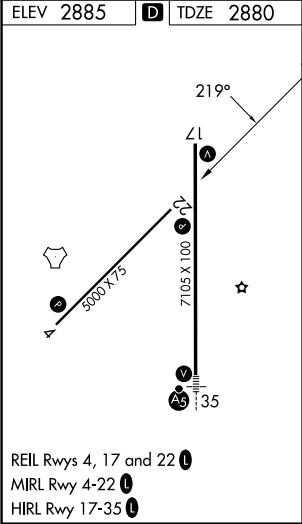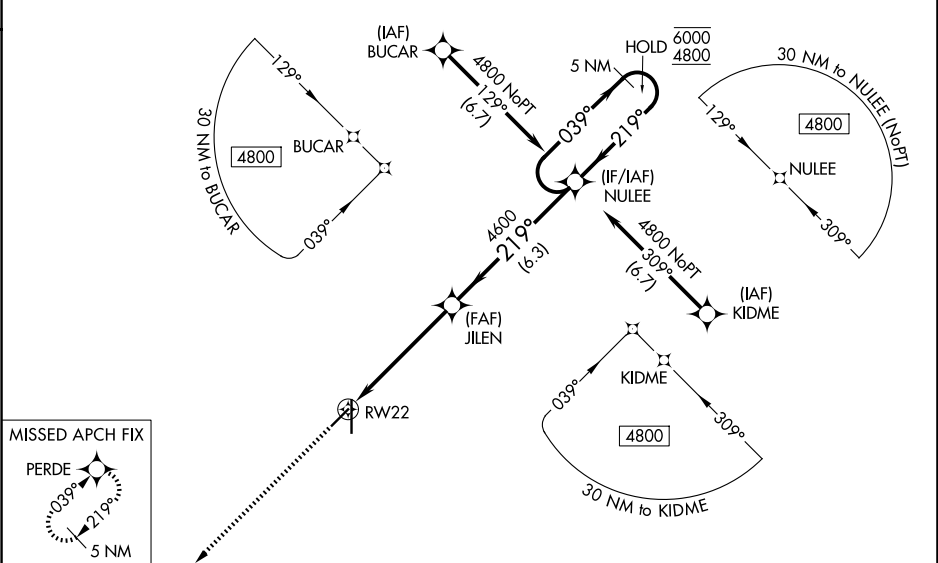

4800

↑

PERDE

NULEE

5 NM Holding Pattern

1.4 NM to RW22

1.4 NM

3.9 NM

6.3 NM

4600

4600

219°

219°

039°

219°

6000

4800

GP 3.00°

TCH 40

CATEGORY	A	B	C	D
LPV DA	3080-1 200 (200-1)			
LNAV/VNAV DA	3168-1 288 (300-1)			
LNAV MDA	3360-1 480 (500-1)	3360-1⅓ 480 (500-1⅓)		
CIRCLING	3360-1 475 (500-1)	3360-1⅓ 475 (500-1⅓)	3400-1½ 515 (600-1½)	3640-2½ 755 (800-2½)