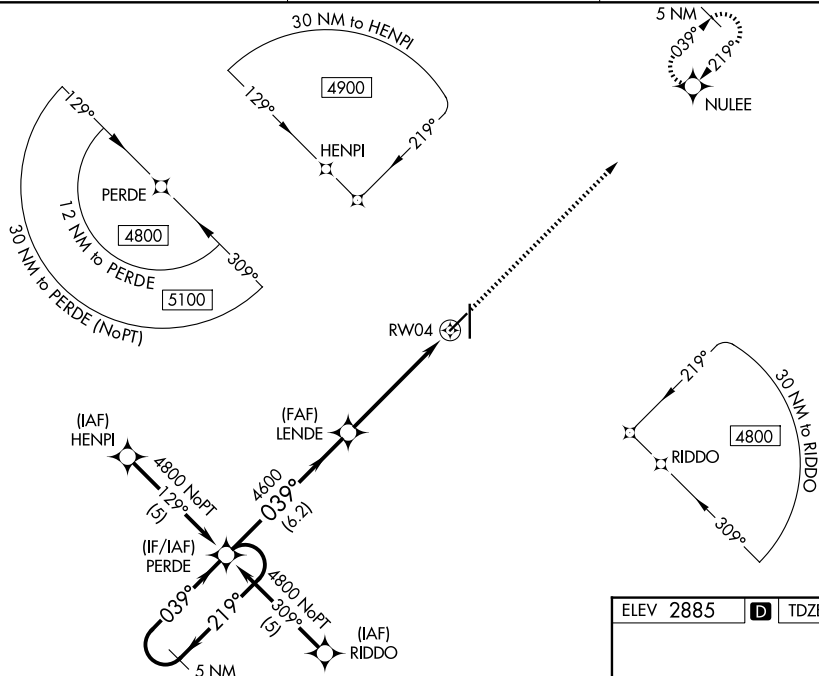



RNAV (GPS) RWY 4
LIBERAL MID-AMERICA RGNL (LBL)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.
▲ Circling NA east of Rwy 17-35. When local altimeter setting not received, use GUY altimeter setting and increase LPV DA to 3248 feet; increase LNAV/VNAV DA to 3412 feet and all visibilities $\frac{3}{8}$ SM. Increase all MDAs 120 feet and LNAV visibility Cat C/D $\frac{3}{8}$ SM, and Circling visibility Cat C/D $\frac{1}{4}$ SM. Baro-VNAV and VDP NA when using GUY altimeter setting.


MISSED APPROACH: Climb to 4800 direct NULEE and hold.

UNICOM
122.8 (CTAF) **L**

ELEV 2885	D	TDZE 2885
-----------	----------	-----------

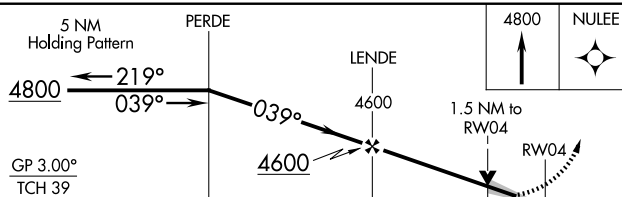

CATEGORY	A	B	C	D
LPV DA	3136-1 251 (300-1)			
LNAV/ VNAV DA	3300-1 $\frac{3}{8}$ 415 (500-1 $\frac{3}{8}$)			
LNAV MDA	3400-1 515 (600-1)		3400-1 $\frac{3}{8}$ 515 (600-1 $\frac{3}{8}$)	
CIRCLING	3400-1 515 (600-1)		3400-1 $\frac{1}{2}$ 515 (600-1 $\frac{1}{2}$)	3640-2 $\frac{1}{2}$ 755 (800-2 $\frac{1}{2}$)

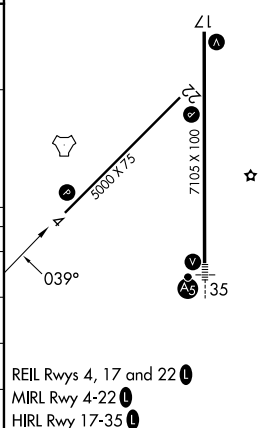

NC-2, 06 AUG 2026 to 03 SEP 2026