


WAAS CH 99607 W17A	APP CRS 173°	Rwy Idg 5500 TDZE 1952 Apt Elev 1953
--	------------------------	---

RNAV (GPS) RWY 17
PRATT RGNL (PTT)


A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Great Bend altimeter setting: Increase LPV DA to 2301 Feet and all visibilities ¼ SM; Increase LNAV/VNAV DA to 2356 feet and all visibilities ½ SM; Increase all MDAs 100 feet and visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using Great Bend altimeter setting.

MISSED APPROACH: Climb to 4300
direct ZUSKI and hold.

AWOS-3PT 118.725	KANSAS CITY CENTER 118.8 322.425	UNICOM 122.8 (CTAF) 0
----------------------------	--	--

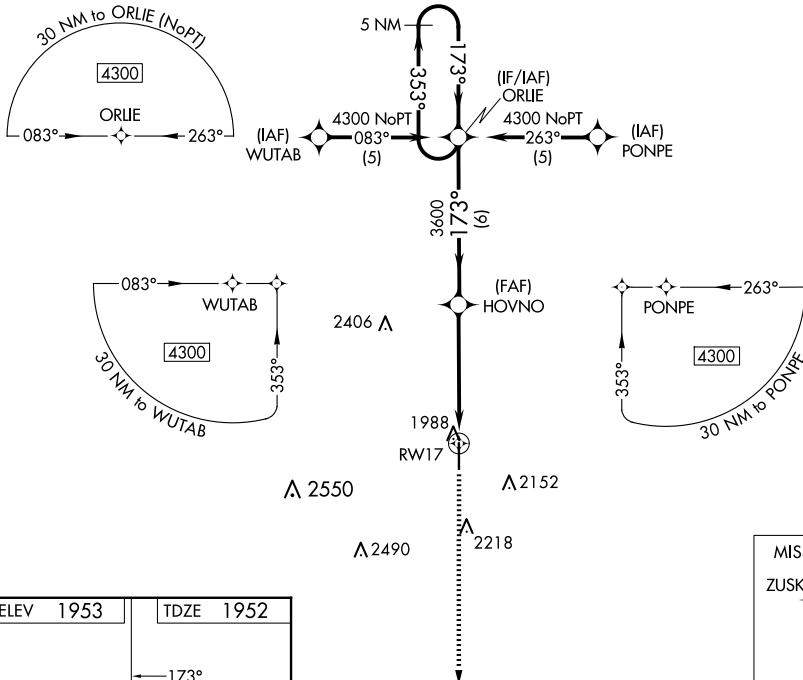

ELEV	1953		TDZE	1952
------	------	--	------	------

REIL Rwy 17 and 35 **L**MIRL Rwy 17-35 **L**

5 NM Holding Pattern

ORLIE

HOVNO

4300

353°

173°

3600

173°

1.1 NM to RW17

*1NAV only.

RW17

GP 3.00°

TCH 40

6 NM

3.9 NM

1.1 NM

4300

ZUSKI