

LOC/DME I-EVV 109.9 Chan 36	APP CRS 221°	Rwy Ldg TDZE 422 Apt Elev 422
---	------------------------	---

ILS or LOC RWY 22
EVANSVILLE RGNL (E V V)

RADAR or DME required for procedure entry at AUGUS.


⚠


Circling Rwy 9 NA at night. For inop ALS, increase S-LOC 22 Cats C and D visibility to 1¾ SM. DME minimums: For inop ALS, increase S-LOC 22 Cats C and D visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 2500 direct PXV VORTAC and hold.

ATIS 120.2	EVANSVILLE APP CON ★ 124.025 290.9	EVANSVILLE TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

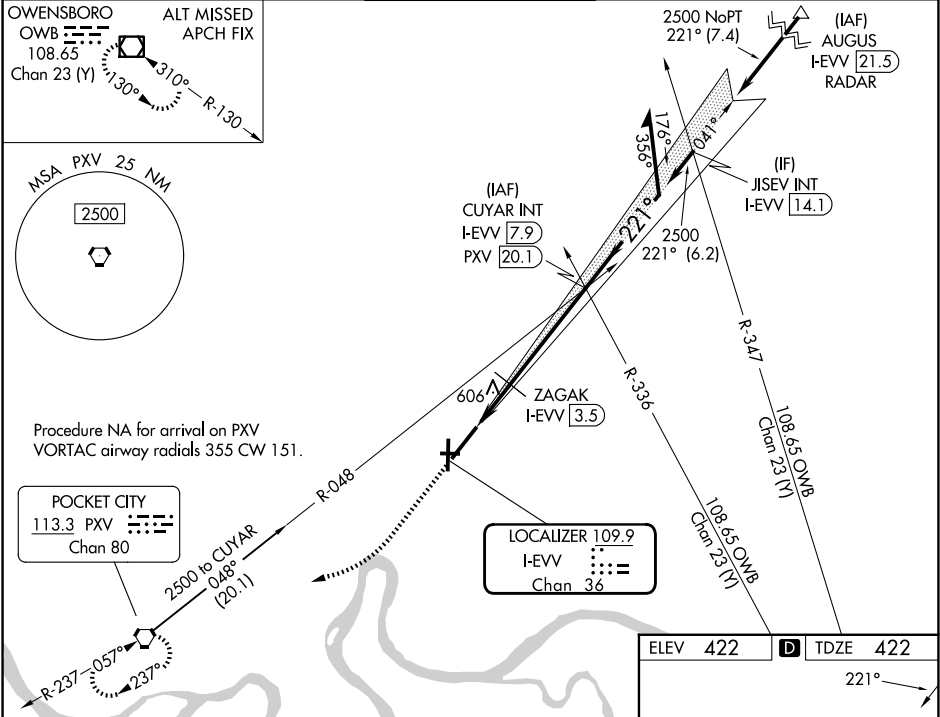

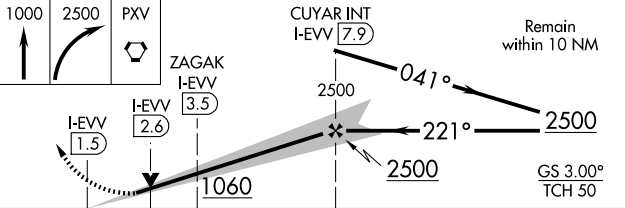1000 ↑	2500 ↗	PXV 					CUYAR INT I-EVV 7.9	ZAGAK I-EVV 3.5	I-EVV 1.5	I-EVV 2.6	1060	2500	2500	221°	041°	GS 3.00° TCH 50	Remain within 10 NM
1.2 NM		0.9 NM		4.4 NM													
CATEGORY		A		B		C		D									
S-ILS 22 *		622/24		200 (200-½)													
S-LOC 22		1060/24		638 (700-½)		1060-1¾		638 (700-1¾)									
CIRCLING		1060-1		638 (700-1)		1060-1¾		638 (700-1¾)		1060-2		638 (700-2)					
ZAGAK FIX MINIMUMS (DME REQUIRED)																	
S-LOC 22		840/24		418 (500-½)		840/40		418 (500-¾)									
CIRCLING		920-1		1040-1		1040-1¾		618 (700-1)		1040-2		618 (700-2)					
		498 (500-1)		618 (700-1)		618 (700-1¾)		618 (700-2)									

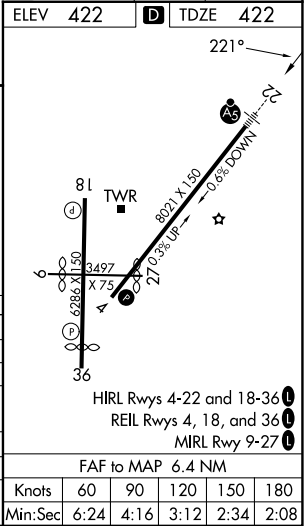

EC-2, 06 AUG 2026 to 03 SEP 2026

EC-2, 06 AUG 2026 to 03 SEP 2026