


LOC/DME I-DSO 109.9 Chan 36	APP CRS 041°	Rwy Ldg TDZE Apt Elev	8021 389 422
ILS or LOC RWY 4 EVANSVILLE RGNL (EVV)			

ASR

Circling Rwy 9 NA at night.

MISSED APPROACH: Climb to 1500 then climbing left turn to 2500 direct PXV VORTAC and hold.

ATIS 120.2	EVANSVILLE APP CON ★ 124.025 290.9	EVANSVILLE TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

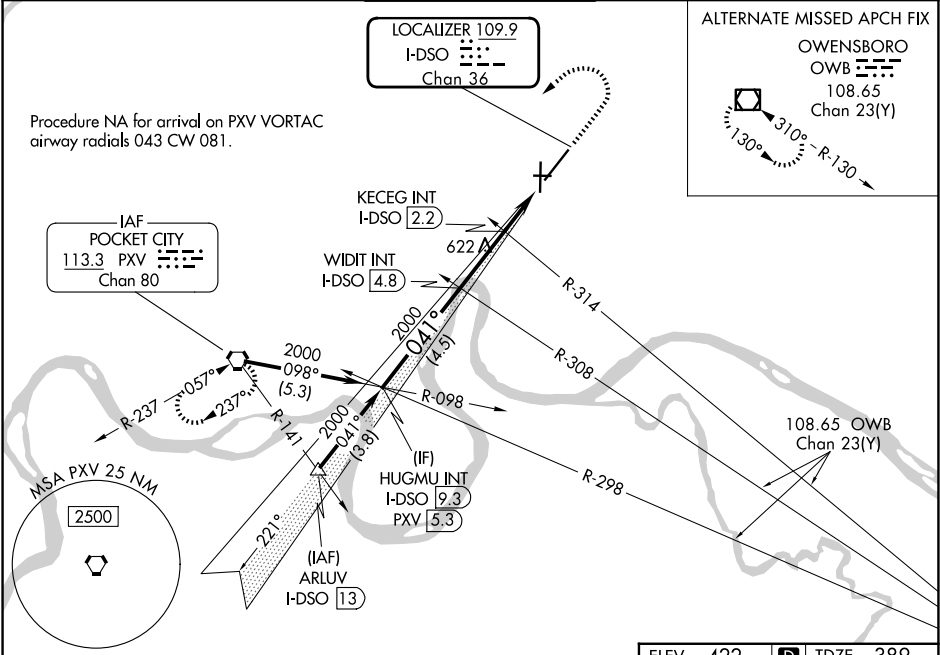

1500

2500

PXV

HUGMU INT
I-DSO 9.3

WIDIT INT
I-DSO 4.8

2000

041°

2000

1180

KECEG INT
I-DSO 2.2

I-DSO DME ANTENNA

I-DSO 1.2

I-DSO 0.2

GS 3.00°
TCH 49

4.5 NM

2.6 NM

1 NM

1.4 NM

ELEV 422 D TDZE 389

HIRL Rwys 4-22 and 18-36

REIL Rwys 4, 18, and 36

MIRL Rwy 9-27

81

TWR

3497

6

4286

36

041°

0.3% UP

0.3% DOWN

8021 X 150

27

75

FAF to MAP 4.9 NM

Knots

60

90

120

150

180

Min:Sec

4:54

3:16

2:27

1:58

1:38

CATEGORY	A	B	C	D
S-ILS 4		589-3/4	200 (200-3/4)	
S-LOC 4	1180-1 791 (800-1)	1180-1 1/4 791 (800-1 1/4)	1180-2 1/2	791 (800-2 1/2)
CIRCLING	1180-1 758 (800-1)	1180-1 1/4 758 (800-1 1/4)	1180-2 1/2	758 (800-2 1/2)
KECEG FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 4	880-1	491 (500-1)	880-1 3/8	491 (500-1 3/8)
CIRCLING	920-1 498 (500-1)	1040-1 618 (700-1)	1040-1 3/4 618 (700-1 3/4)	1040-2 618 (700-2)