

WAAS CH 99616 W13A	APP CRS 128°	Rwy Ldg TDZE Apt Elev	7216 592 598
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13
ABRAHAM LINCOLN CAPITAL (SPI)


RNP APCH - GPS.



Baro-VNAV and VDP NA when using Lincoln altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Lincoln altimeter setting: increase LPV DA to 932 feet and all visibilities 1/8 SM; increase LNAV/VNAV DA to 1068 feet and all visibilities 1/4 SM; increase all MDAs 60 feet and LNAV visibility Cat C/D 1/4 SM, and Circling visibility Cat C/D 1/4 SM. Rwy 13 helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH:
Climb to 3100 direct
CONOX and hold.

ATIS 127.65 270.1	SAINT LOUIS APP CON 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 257.8	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	--	--	-------------------------------	-------------------------

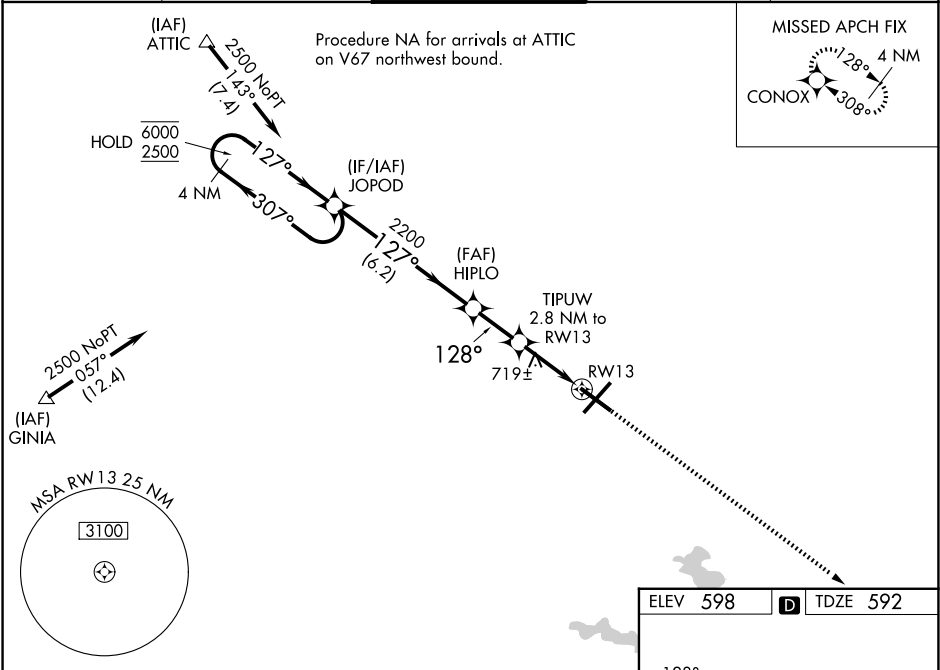

4 NM Holding Pattern		JOPOD		3100 CONOX	
6000 ← 307°		2500 → 127°		↑	
GP 3.00°		TIPUW 2.8 NM to RW13		1.1 NM to RW13	
TCH 50		2200		1520	
		6.2 NM		2 NM	
				1.7 NM	
				1.1 NM	
CATEGORY	A	B	C	D	
LPV DA	875-7/8		283 (300-7/8)		
LNAV/VNAV DA	1011-1 1/8		419 (500-1 1/8)		
LNAV MDA	980-1	388 (400-1)	980-1 1/8	388 (400-1 1/8)	
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2 1/4 762 (800-2 1/4)	1380-2 1/2 782 (800-2 1/2)	

