RNAV (GPS) RWY 31

ABRAHAM LINCOLN CAPITAL (SPI)

WAAS	APP CRS	Rwy Ldg	7000
CH 90124	308°	TDZE	590
W31A		Apt Elev	598

RNP APCH - GPS.

T A ASR Baro-VNAV and VDP NA when using AAA altimeter setting. Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use AAA altimeter setting and increase LPV DA to 898 feet; increase LNAV/VNAV DA to 967 feet; increase all MDAs 60 feet and LNAV visibility Cats C and D ⅛ SM, and Circling visibility Cats C and D ¼ SM. For inop ALS, increase LNAV/VNAV visibility all Cats to ⅞ SM, increase LNAV visibility Cats A and B to 1 SM, and Cats C and D to 1¾ SM. For inop ALS when using AAA altimeter setting, increase LPV visibility all Cats to ⅞ SM, increase LNAV/VNAV visibility all Cats to 1 SM, increase LNAV visibility Cats A and B to 1 SM, and Cats C and D to 1⅞ SM.

MALSR (A5)

MISSED APPROACH: Climb to 2500 direct JOPOD and hold.

ATIS	SAINT LOUIS APP CON	SPRINGFIELD TOWER ★	GND CON	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) L 257.8	121.9 348.6	122.95

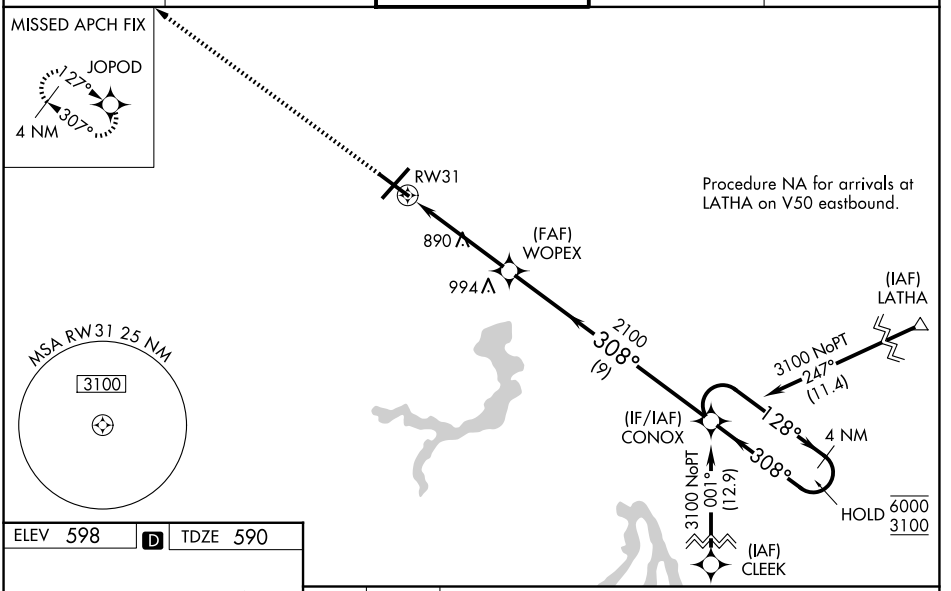

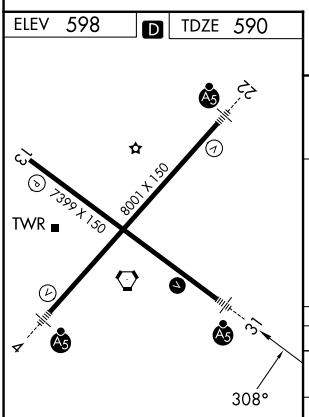

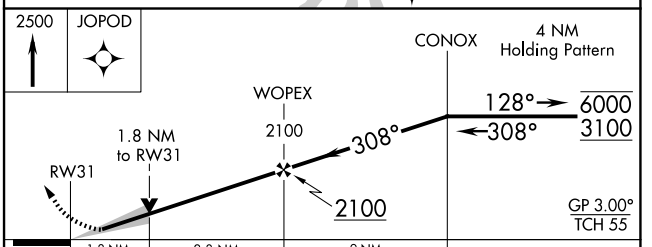

CATEGORY	A	B	C	D
LPV DA	840-¾ 250 (300-¾)			
LNAV/VNAV DA	909-¾ 319 (400-¾)			
LNAV MDA	1200-¾ 610 (700-¾)		1200-1⅜ 610 (700-1⅜)	
CIRCLING	1200-1 602 (700-1)		1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)

REIL Rwy 13 L
HIRL Rwys 4-22 and 13-31 L

EC-3, 06 AUG 2026 to 03 SEP 2026
EC-3, 06 AUG 2026 to 03 SEP 2026