

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>69327</b><br><b>W33A</b> | APP CRS<br><b>333°</b> | Rwy Ldg<br>TDZE <b>108</b><br>Apt Elev <b>120</b> |
|----------------------------------------|------------------------|---------------------------------------------------|



RNAV (GPS) RWY 33

NORTHEAST PHILADELPHIA (PNE)

Baro-VNAV NA when using Philadelphia Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). When local altimeter setting not received, use Philadelphia Intl altimeter setting: increase LPV DA to 430 feet and LNAV/VNAV DA to 450 feet and all LPV and LNAV/VNAV visibilities ¼ SM; increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM and Circling visibility Cat C/D ¼ SM. DME/DME RNP-0.3 NA.

MISSED APPROACH:  
Climb to 2500 direct  
PACKS and on track  
003° to MAZIE and hold.

|                       |                                            |                                                             |                         |                         |
|-----------------------|--------------------------------------------|-------------------------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>121.15</b> | PHILADELPHIA APP CON<br><b>123.8 291.7</b> | NORTHEAST PHILADELPHIA TOWER ★<br><b>126.9 (CTAF) 278.8</b> | GND CON<br><b>121.7</b> | UNICOM<br><b>122.95</b> |
|-----------------------|--------------------------------------------|-------------------------------------------------------------|-------------------------|-------------------------|

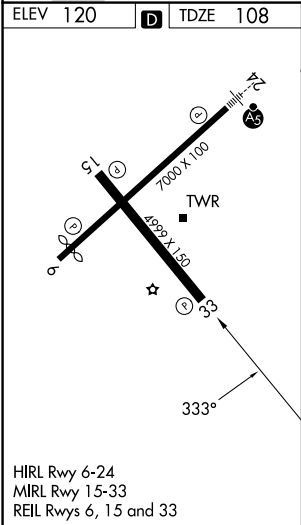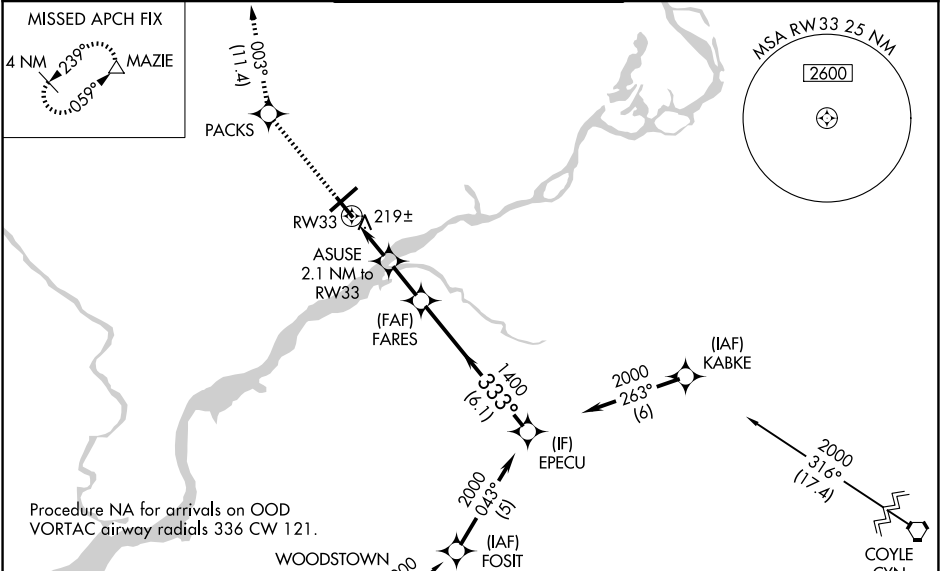

|                      |                   |             |                        |                      |
|----------------------|-------------------|-------------|------------------------|----------------------|
| 2500                 | PACKS             | MAZIE       | FARES                  | EPECU                |
| ↑                    | tr 003°           | △           | 1400                   | 2000                 |
| * LNAV only          |                   |             |                        |                      |
| ASUSE 2.1 NM to RW33 |                   |             |                        |                      |
| RW33                 |                   |             |                        |                      |
| * 800                |                   |             |                        |                      |
| 2.1 NM 1.8 NM 6.1 NM |                   |             |                        |                      |
| CATEGORY             | A                 | B           | C                      | D                    |
| LPV DA               | 380-1 272 (300-1) |             |                        |                      |
| LNAV/VNAV DA         | 400-1 292 (300-1) |             |                        |                      |
| LNAV MDA             | 480-1 372 (400-1) |             |                        |                      |
| CIRCLING             | 700-1             | 580 (600-1) | 720-1½<br>600 (600-1½) | 780-2<br>660 (700-2) |