
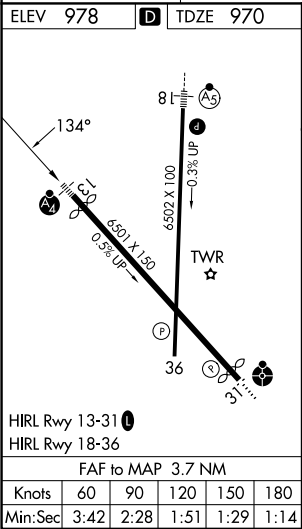


LOC I-JLN 110.3	APP CRS 134°	Rwy Ldg 5813 TDZE 970 Apt Elev 978
---------------------------	------------------------	---

ILS or LOC RWY 13
JOPLIN RGNL (JLN)

ADF required for LOC only. RADAR required.		MALSF 	MISSED APPROACH: Climb to 3100 on I-JLN LOC localizer course southeast to HOVIL/RADAR and hold.
 	Autopilot coupled approach NA below 1147'. Inop table does not apply to S-ILS 13 all Cats. MALSF (NSTD) 1368'.		

ATIS 120.85	KANSAS CITY CENTER 128.6 282.325	JOPLIN TOWER* 119.8 (CTAF) 0	GND CON 121.6	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

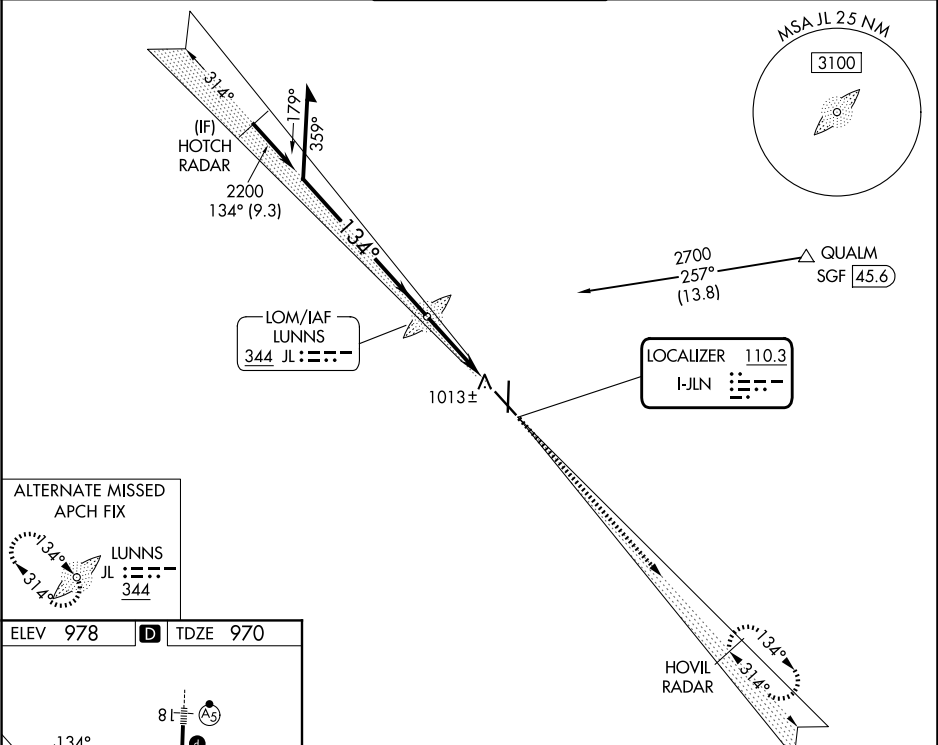

Remain within 10 NM		JL LOM LUNNS	6000	3100	HOVIL RADAR
2700		134°	2178	I-JLN SE crs	
GS 3.00°		TCH 40	2200		
			3.7 NM		
CATEGORY	A	B	C	D	
S-ILS 13	1170/40		200 (200-¾)		
S-LOC 13	1300/40		330 (400-¾)		
CIRCLING	1460-1	1500-1	1540-1½	1580-2	
	482 (500-1)	522 (600-1)	562 (600-1½)	602 (700-2)	