

APP CRS	Rwy Ldg	9426
164°	TDZE	430
	Apt Elev	433

RNAV (RNP) Z RWY 16C


SEATTLE-TACOMA INTL (SEA)

⚠ For uncompensated Baro-VNAV systems, procedure NA below -6°C (22°F) or above 54°C (130°F). GPS required. See additional requirements on adjacent information page. For inop ALS, increase RNP 0.12 all Cats visibility to RVR 5200, and increase RNP 0.30 all Cats visibility to 1 3/8 SM.

ALSF-2

MISSED APPROACH: Climb direct ZIVDI to cross ZIVDI at or below 2000, then climb to 5000 on track 163° to MILLT and hold, continue climb-in-hold to 5000.

D-ATIS 118.0	SEATTLE APP CON 133.65 273.45	SEATTLE TOWER 119.9 239.3 (16L, 16C, 34C, 34R) 120.95 239.3 (16R, 34L)	GND CON 121.7
------------------------	---	--	-------------------------

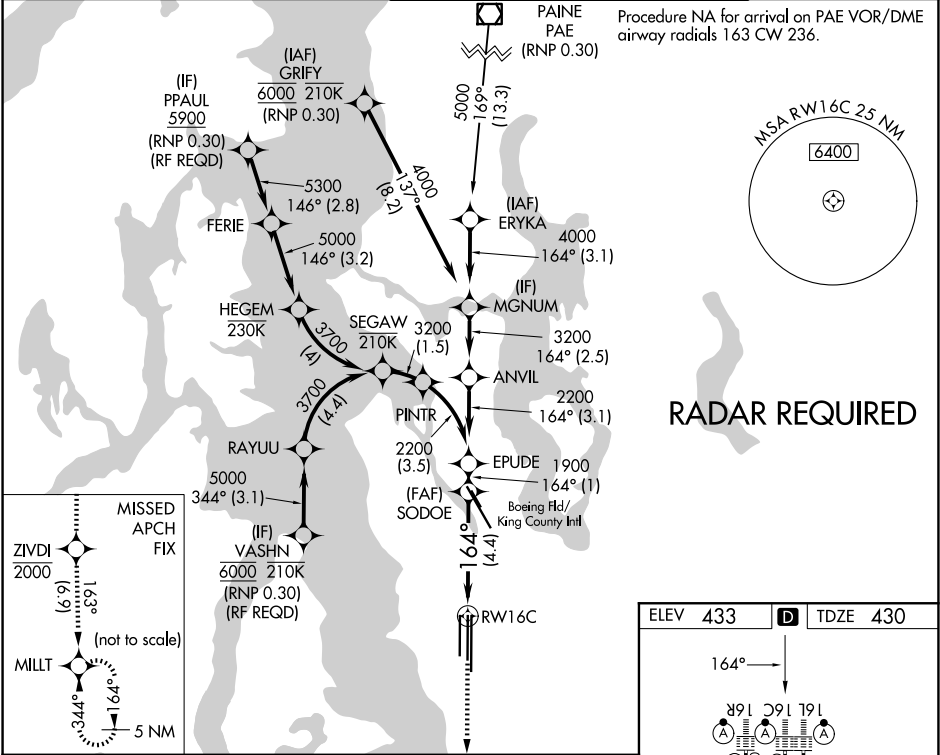

↑ ZIVDI 2000

↑ 5000 tr 163°

MILLT

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

EPUDE 2200

SODOE 1900

GP 3.00° TCH 57


See Planview for multiple IF locations.

RW16C

4.4 NM 1 NM

CATEGORY	A	B	C	D
RNP 0.12 DA		758/29	328 (400-5%)	
RNP 0.30 DA		834/43	404 (500-7%)	

AUTHORIZATION REQUIRED

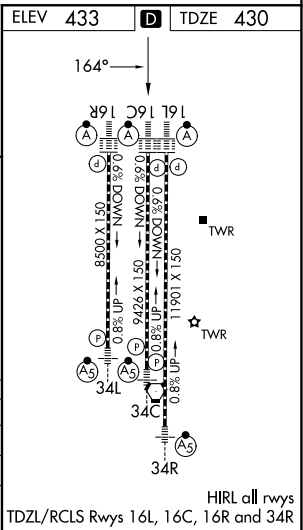

NW-1, 06 AUG 2026 to 03 SEP 2026

NW-1, 06 AUG 2026 to 03 SEP 2026