# RNAV (GPS) RWY 4L

## WILMINGTON AIR PARK (ILN)

| WAAS CH 62914 W04A | APP CRS 044° | Rwy Ldg 10701 TDZE 1057 Apt Elev 1077 |
|---|---|---|

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV Cats A/B visibility to RVR 5500 and LNAV Cats C/D visibility to RVR 6000. *1800 RVR authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct WIZRD and hold.

| D-ATIS | COLUMBUS APP CON | WILMINGTON TOWER | GND CON |
|---|---|---|---|
| 124.925 | 118.85 269.275 | 119.475 | 121.6 |

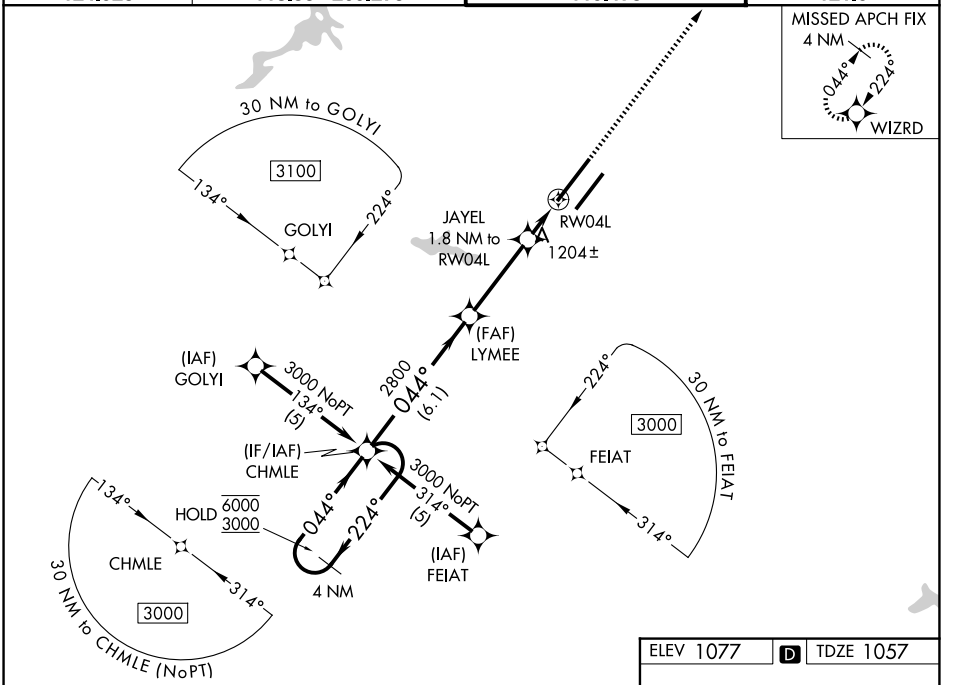


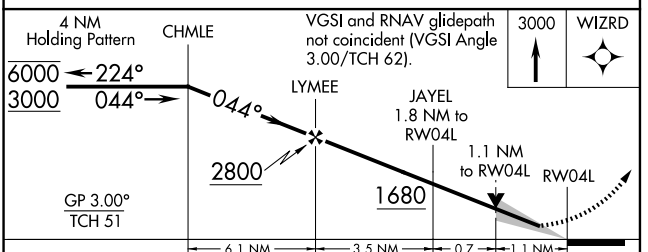


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA * | 1257/24 200 (200-½) | | | |
| LNAV/VNAV DA | 1505/45 448 (500-⅞) | | | |
| LNAV MDA | 1460/24 403 (400-½) | | 1460/40 403 (400-¾) | |
| CIRCLING | 1560-1 483 (500-1) | | 1860-2¼ 783 (800-2¼) | 1860-2½ 783 (800-2½) |

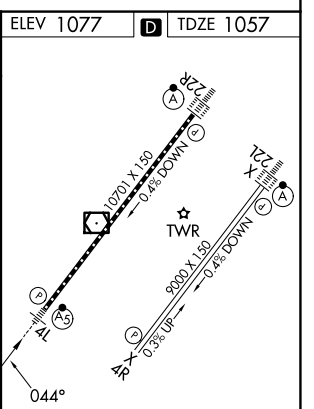


TDZ/CL Rwys 22L and 22R
HIRL Rwys 4L-22R and 4R-22L



EC-2, 06 AUG 2026 to 03 SEP 2026
EC-2, 06 AUG 2026 to 03 SEP 2026