

LOC I-LOW

110.7

APP CRS

012°

Rwy Ldg

8400

TDZE

6649

Apt Elev

6649

ILS or LOC RWY 1

YELLOWSTONE (WYS)

ADF required. DME required for MUPDE stepdown fix.

MALSR

MISSED APPROACH: Climb to 9000, then climbing right turn to 10100 direct TARGY LOM and hold.

NA

-19°C

Obtain local altimeter setting on CTAF, when not received procedure NA. Inoperative table does not apply to S-LOC 1 Cat A. For inoperative MALSR, increase S-ILS 1 all Cats visibility to 2 3/4 mile.

AWOS-3P


118.1

SALT LAKE CENTER

132.4 338.3

UNICOM

123.0 (CTAF)

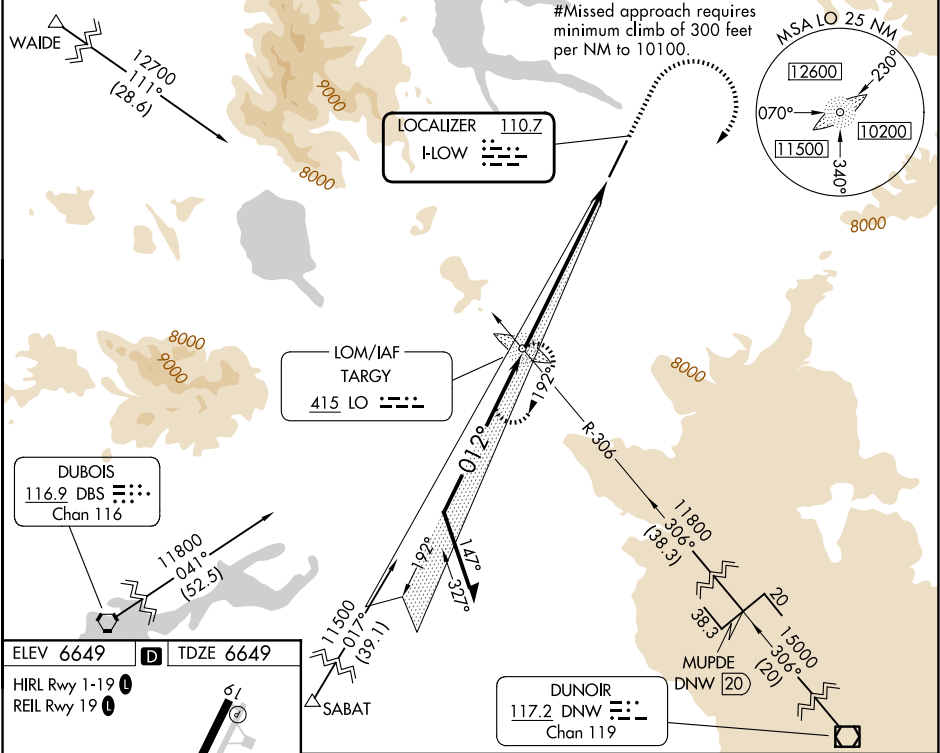

ELEV 6649

D

TDZE 6649

HIRL Rwy 1-19

REIL Rwy 19

8400 X 150

6705

012°

FAF to MAP 6.9 NM

Knots	60	90	120	150	180
Min:Sec	6:54	4:36	3:27	2:46	2:18

Remain within 10 NM

10100

192°

012°

GS 3.00° TCH 50

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 50).

9600

*9000

8941

6.9 NM

CATEGORY

A

B

C

D

S-ILS 1#

6849-1/2

200 (200-1/2)

S-ILS 1

7449-2 1/4

800 (800-2 1/4)

S-LOC 1

7780-1 1/4

1131 (1200-1 1/4)

7780-1

1131 (1200-1)

7780-2 1/2

1131 (1200-2 1/2)

CIRCLING

7780-1 1/4

1131 (1200-1 1/4)

7780-1 1/2

1131 (1200-1 1/2)

7780-3

1131 (1200-3)

8020-3

1371 (1400-3)