

WAAS CH 86234 W22A	APP CRS 223°	Rwy Ldg TDZE Apt Elev	8748 36 40
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 22


Wallops Flight Facility (WAL)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). DME/DME-RNP 0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Salisbury altimeter setting: increase LPV DA to 367 and all Cats visibility ¼ mile; increase LNAV/VNAV DA to 489 and all Cats visibility ½ mile; increase all MDA 60 feet and LNAV Cats C/D visibility ½ mile and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Salisbury altimeter setting.

MISSED APPROACH:
Climb to 600 then climbing right turn to 2000 direct MAGGO and hold.

ASOS 119.175	PATUXENT APP CON★ 127.95 314.0	Wallops Tower★ 126.5 (CTAF) 306.975 (CTAF)	GND CON 127.875 269.325
------------------------	--	--	-----------------------------------

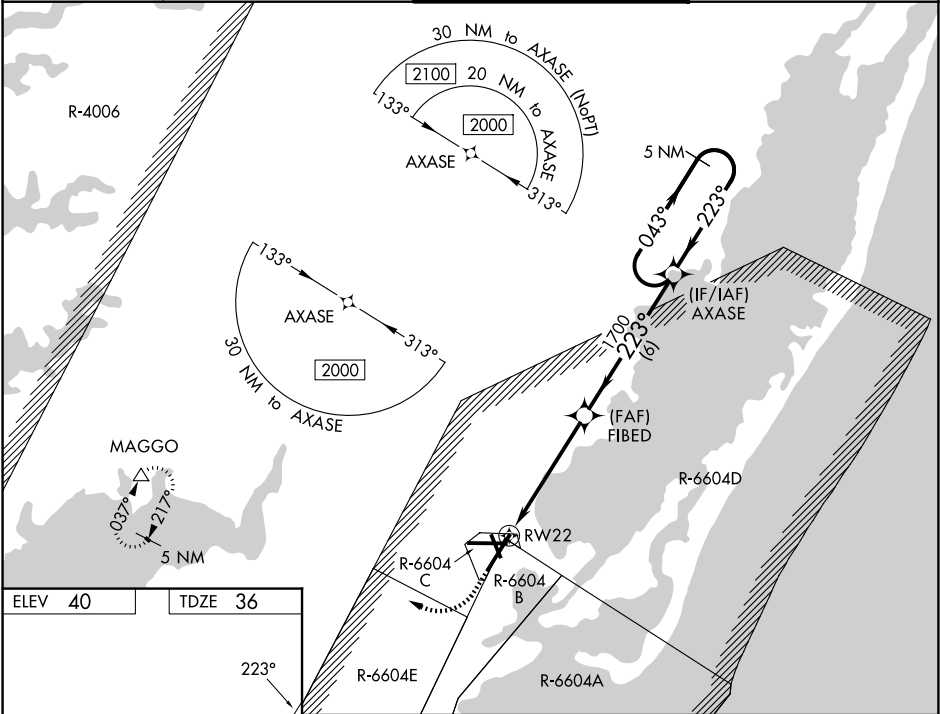

ELEV 40 TDZE 36

	600	2000	MAGGO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 60).	5 NM Holding Pattern
	↑	↶	△		
* LNAV only.		* 1.3 NM to RW22			
	↶	↶			
	1700	1700			
	1.3 NM	3.8 NM	6 NM		
CATEGORY	A	B	C	D	
LPV DA	314-7⁄8		278 (300-7⁄8)		
LNAV/VNAV DA	436-1⁄8		400 (400-1⁄8)		
LNAV MDA	500-1	464 (500-1)	500-1⁄8	464 (500-1⁄8)	
CIRCLING	600-1	560 (600-1)	620-1½ 580 (600-1½)	860-2¾ 820 (900-2¾)	

REIL all Rwys
HIRL Rws 4-22, 10-28 and 17-35

Wallops Island, Virginia
Amdt 1B 21JUL16