

WAAS CH 86727 W21A	APP CRS 210°	Rwy Ldg TDZE Apt Elev	6780 857 859
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21

MID-OHIO VALLEY RGNL (PKB)



RNP APCH.

▼

Baro-VNAV and VDP NA when using Athens/Albany altimeter setting. Rwy 21 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 38°C. When local altimeter setting not received, use Athens/Albany altimeter setting: increase LPV DA to 1249 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1237 feet and visibility all Cats ½ SM; increase all MDAs 100 feet and visibility Cat C/D ½ SM. Circling Rwy 10, 28 NA at night.

MISSED APPROACH:
Climb to 3000 direct
UNSAW and hold.

ATIS 124.35	INDIANAPOLIS CENTER 125.55 317.475	PARKERSBURG TOWER ★ 123.7 (CTAF) 0 257.8	GND CON 126.45	UNICOM 122.95
-----------------------	--	--	--------------------------	-------------------------

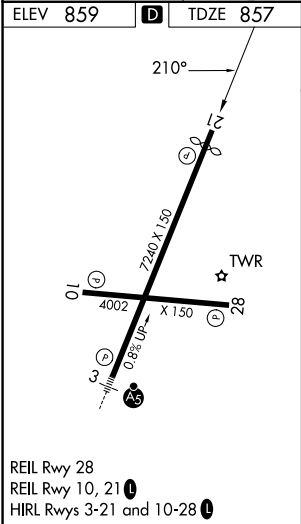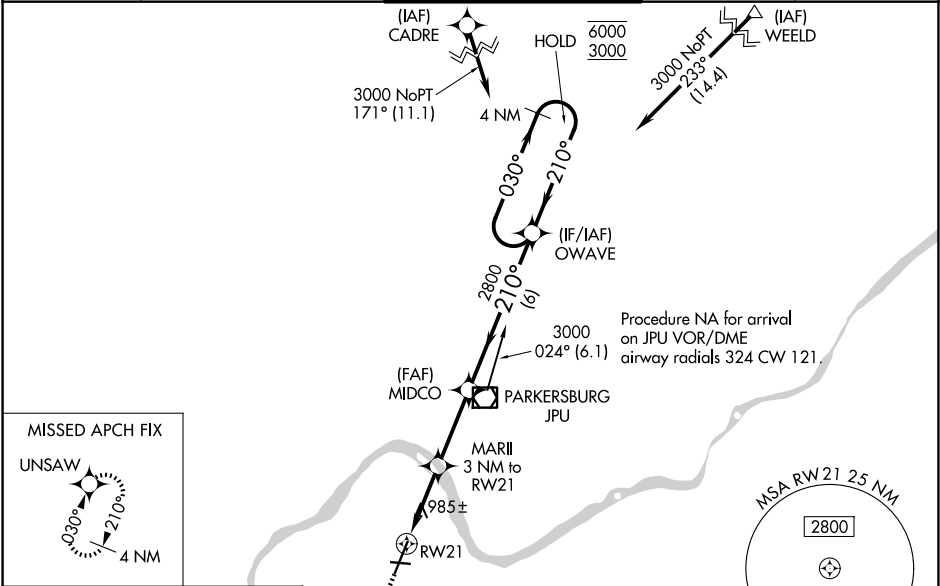

3000	UNSAW	MARII 3 NM to RW21	MIDCO 2800	OWAVE	4 NM Holding Pattern
*LNAV only.	*1 NM to RW21	*1860	2800	030° 210°	6000 3000
GP 3.00° TCH 56					
CATEGORY	A	B	C	D	
LPV DA	1149-7/8		292 (300-7/8)		
LNAV/VNAV DA	1137-7/8		280 (300-7/8)		
LNAV MDA	1240-1	383 (400-1)	1240-1½	383 (400-1½)	
CIRCLING	1320-1 461 (500-1)	1380-1 521 (600-1)	1640-2¼ 781 (800-2¼)	1640-2½ 781 (800-2½)	