

WAAS CH 82010 W05A	APP CRS 053°	Rwy Ldg TDZE Apt Elev	8002 666 668
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 5
MBS INTL (MBS)


V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to RVR 6000.
****** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR



MISSED APPROACH:
Climb to 2300 direct
FOROX and hold.

ATIS 125.925	GREAT LAKES APP CON★ 126.45 235.625	SAGINAW TOWER★ 120.1 (CTAF) 0 257.7	GND CON 121.7	UNICOM 122.95
------------------------	---	---	-------------------------	-------------------------

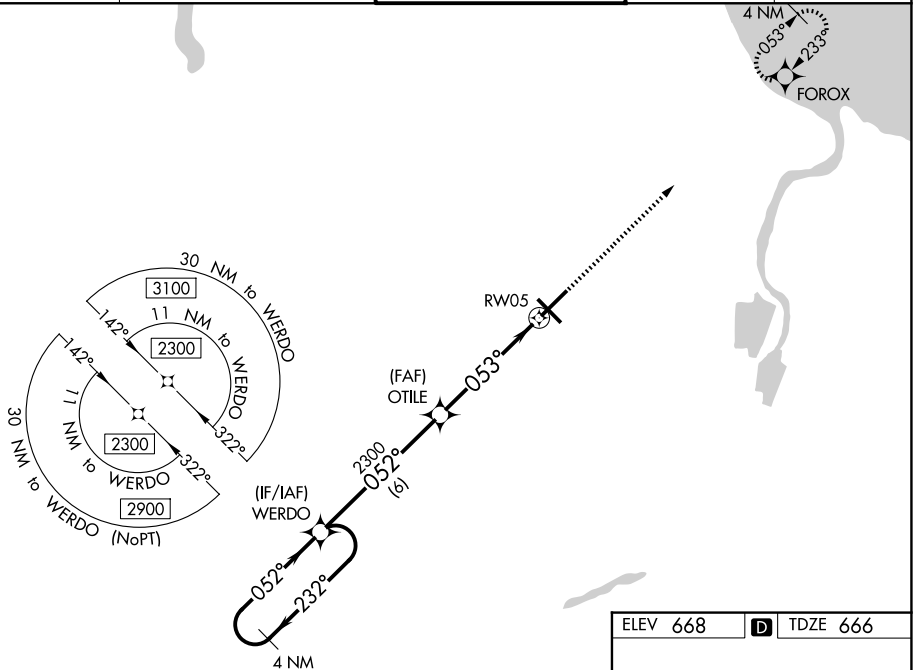

The diagram illustrates the RW05 holding pattern. It begins with a 4 NM Holding Pattern, followed by a turn to 232° for 6 NM to WERDO. From WERDO, the path continues to OTILE (3.9 NM) and then to RW05 (1.1 NM). The final leg of the pattern is a turn to 230° for 1.1 NM. The diagram also shows a 052° turn from the initial heading and a 053° turn towards RW05. A note indicates *1.1 NM to RW05 and *RNAV only.

