

ILS or LOC RWY 24
NANTUCKET MEML (ACK)

MISSED APPROACH: Climb to 2300 on ACK VOR/DME R-240 to UFTAC INT and hold.


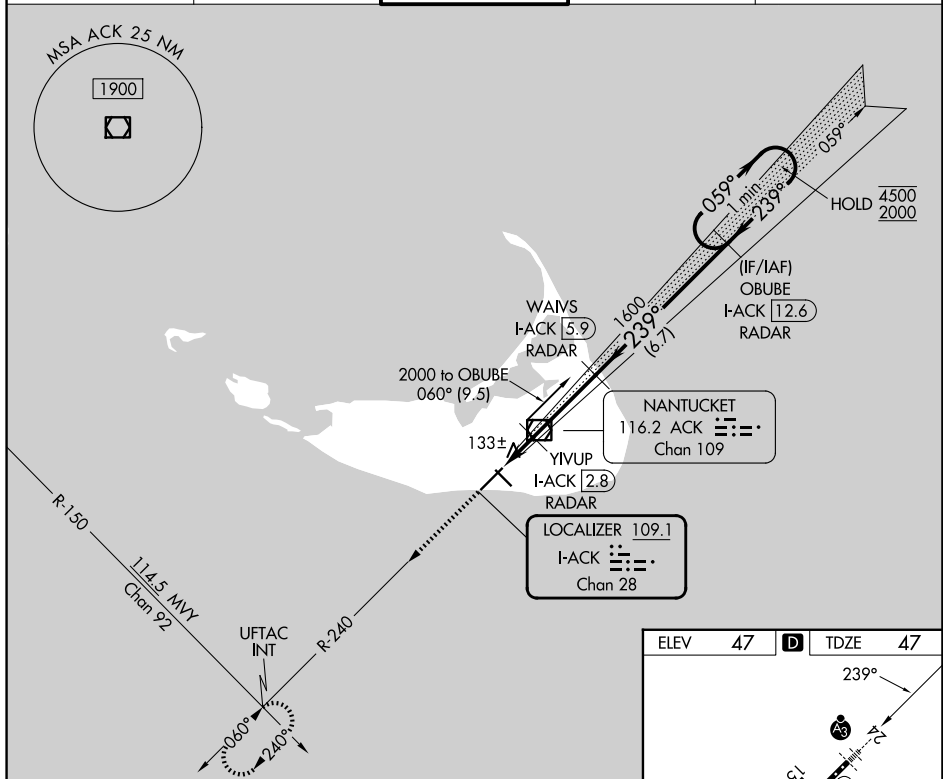
SSALR

Diagram illustrating the FAF to MAP 4.7 NM. The diagram shows a 239° heading. Key points include TDZE 47, TWR, and various altitudes: 6303 x 150, 4500 x 100, and 4500 x 100. It also lists Rwy 24, Rwy 6-24, Rwy 15-33, and Rwy 15 and 33.