

|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>87014</b><br><b>W32A</b> | APP CRS<br><b>321°</b> | Rwy Ldg <b>6007</b><br>TDZE <b>64</b><br>Apt Elev <b>64</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|

RNAV (GPS) RWY 32

YUBA COUNTY (MYV)



RNP APCH - GPS.

⚠

Circling to Rwy 5, 23 NA at night. Baro-VNAV NA when using LHM altimeter setting.  
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C.  
When local altimeter setting not received, use LHM altimeter setting and increase LPV DA to 357 feet; increase LNAV/VNAV DA to 418 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 4000 direct HALOW and on track 295° to GRIDD and hold.

|                        |                                      |                                |
|------------------------|--------------------------------------|--------------------------------|
| ASOS<br><b>118.475</b> | NORCAL APP CON<br><b>125.4 259.1</b> | UNICOM<br><b>123.05 (CTAF)</b> |
|------------------------|--------------------------------------|--------------------------------|

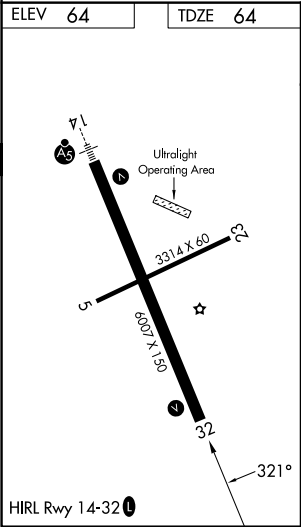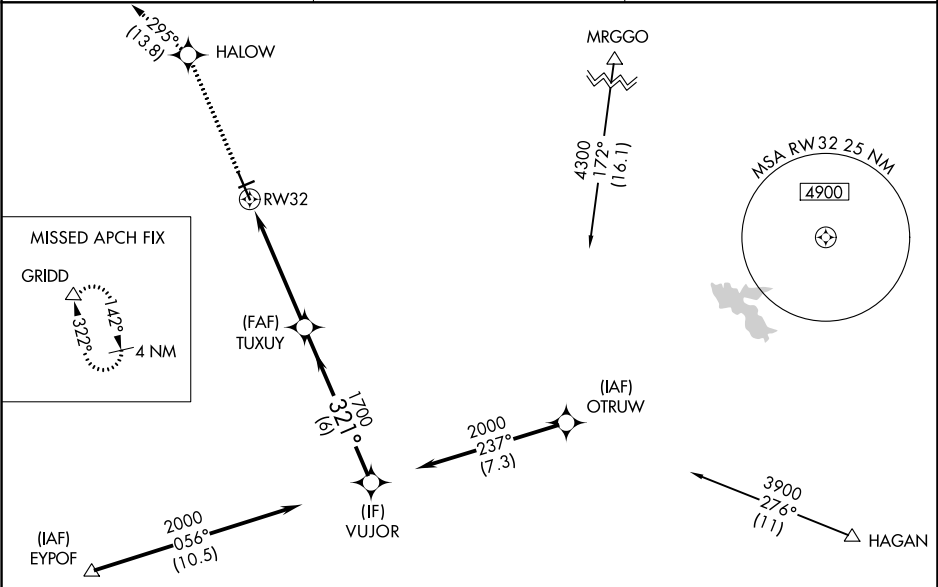

|              |                   |                |                     |                   |      |
|--------------|-------------------|----------------|---------------------|-------------------|------|
| 4000         | HALOW             | tr 295°        | GRIDD               | VUJOR             |      |
|              |                   |                |                     |                   |      |
|              |                   | 1.3 NM to RW32 |                     | 1700              | 2000 |
|              |                   | 1.3 NM         | 3.7 NM              | 6 NM              |      |
| CATEGORY     | A                 | B              | C                   | D                 |      |
| LPV DA       | 314-1             |                | 250 (300-1)         |                   |      |
| LNAV/VNAV DA | 375-1½            |                | 311 (400-1½)        |                   |      |
| LNAV MDA     | 540-1 476 (500-1) |                | 540-1¼ 476 (500-1¼) |                   |      |
| CIRCLING     | 540-1 476 (500-1) |                | 560-1½ 496 (500-1½) | 640-2 576 (600-2) |      |