


WAAS CH 82510 W07A	APP CRS 065°	Rwy Ldg 4784 TDZE 319 Apt Elev 331
--	------------------------	---

RNAV (GPS) RWY 7
WATERTOWN INTL (ART)

RNP APCH - GPS. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV visibilities all Cats to 1½ SM and LNAV Cat C/D visibilities to 1½ SM.			MALSR AS	MISSED APPROACH: Climb to 900 then climbing left turn to 3500 direct NOYAQ and hold.
ASOS 132.325	KGTB ATIS 119.525	WHEELER-SACK APP CON 124.875 307.125	CLNC DEL 120.8	UNICOM 123.0 (CTAF)

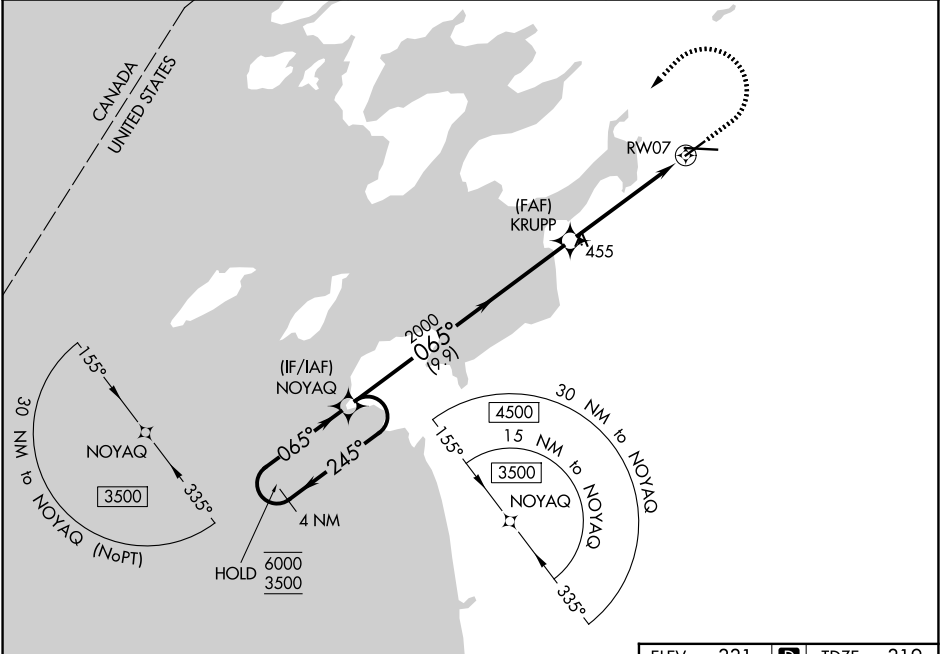

4 NM Holding Pattern		ELEV 331 TDZE 319		
CATEGORY	A	B	C	D
LPV DA	519-½ 200 (200-½)			
LNAV/VNAV DA	800-1 481 (500-1)			
LNAV MDA	800-½	481 (500-½)	800-1	481 (500-1)
CIRCLING	960-1	629 (700-1)	980-1¾ 649 (700-1¾)	1080-2½ 749 (800-2½)