

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>61110</b><br><b>W32A</b> | APP CRS<br><b>319°</b> | Rwy Ldg<br>TDZE <b>750</b><br>Apt Elev <b>755</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 32R

UNIVERSITY OF ILLINOIS/WILLARD (CMI)

⚠



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1° C (-2° F) or above 54° C (130° F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Rantoul altimeter setting. When local altimeter setting not received, use Rantoul altimeter setting and increase all DA 41 feet, all MDA 60 feet; increase LNAV Cat C/D visibility to RVR 5500. For inoperative MALSR, when using local or Rantoul altimeter setting, increase LNAV Cat C/D visibility to 1½ miles.

MALSR

MISSED APPROACH:

Climb to 2800 direct HIPUB and on track 287° to LODGE and hold.

|                       |                                                                                              |                                                         |                         |                         |
|-----------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>124.85</b> | CHAMPAIGN APP CON ★<br><b>121.35 285.65</b> (319°-138°)<br><b>132.85 290.225</b> (139°-318°) | CHAMPAIGN TOWER ★<br><b>120.4</b> (CTAF) <b>0 229.4</b> | GND CON<br><b>121.8</b> | UNICOM<br><b>122.95</b> |
|-----------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------|-------------------------|

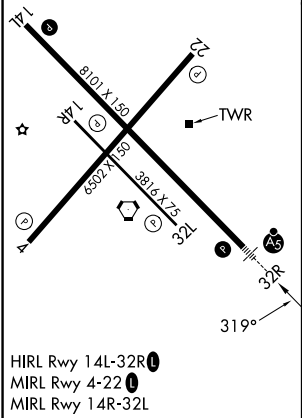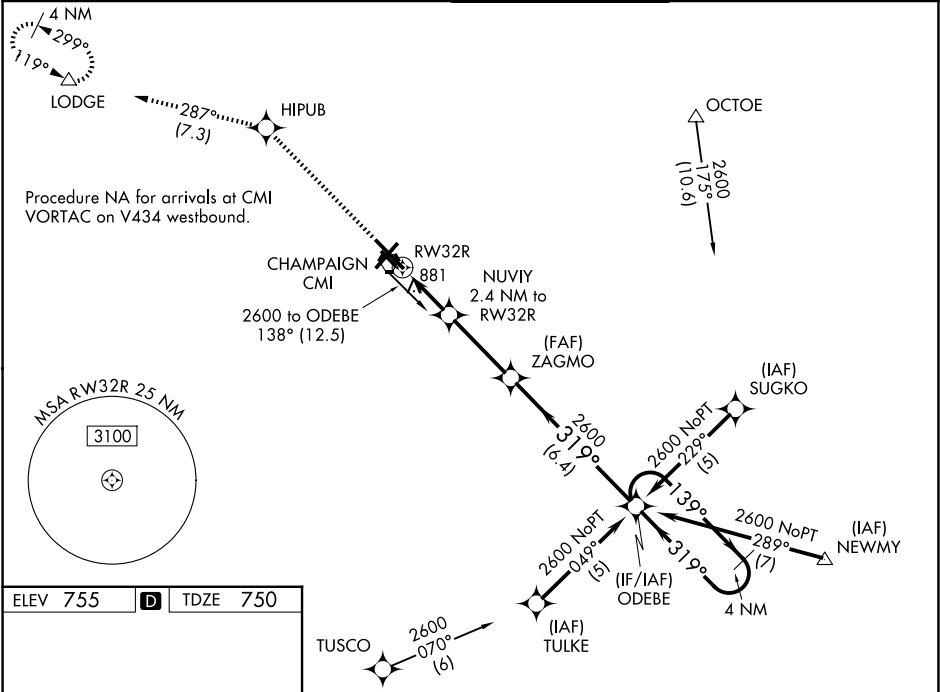

|              |                       |             |                         |                         |       |                      |
|--------------|-----------------------|-------------|-------------------------|-------------------------|-------|----------------------|
| 2800         | HIPUB                 | tr 287°     | LODGE                   | ZAGMO                   | ODEBE | 4 NM Holding Pattern |
| * LNAV only  | NUVIY 2.4 NM to RW32R | * 1560      | 2600                    | 319°                    | 139°  | 2600                 |
| RW32R        |                       |             |                         | 2600                    |       | GP 3.00° TCH 52      |
| 1 NM         | 1.4 NM                | 3.2 NM      | 6.4 NM                  |                         |       |                      |
| CATEGORY     | A                     | B           | C                       | D                       |       |                      |
| LPV DA       |                       | 1000/24     | 250 (300-½)             |                         |       |                      |
| LNAV/VNAV DA |                       | 1159/50     | 409 (500-1)             |                         |       |                      |
| LNAV MDA     | 1200/24               | 450 (500-½) | 1200/45                 | 450 (500-¾)             |       |                      |
| CIRCLING     | 1240-1                | 485 (500-1) | 1500-2¼<br>745 (800-2¼) | 1500-2½<br>745 (800-2½) |       |                      |