

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>50310</b><br><b>W01A</b> | APP CRS<br><b>007°</b> | Rwy Ldg<br>TDZE <b>685</b><br>Apt Elev <b>690</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 1  
ALPENA COUNTY RGNL (APN)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using PZQ altimeter setting. For inop ALS, increase LPV all Cats visibility to ¾ SM, LNAV/VNAV all Cats visibility to 1 SM and LNAV Cats C/D visibility to 1 ¾ SM. When local altimeter setting not received, use PZQ altimeter setting and increase LPV DA to 1029 feet and all visibilities ¾ SM; increase LNAV/VNAV DA to 1084 feet; increase all MDA 60 feet. For inop ALS when using PZQ altimeter setting, increase LPV all Cats visibility to 1 SM.


MALSR

MISSED APPROACH:  
Climb to 3500 direct HIMVO and on track 307° to RABBO and hold.

|                               |                                          |                                                |                               |                         |
|-------------------------------|------------------------------------------|------------------------------------------------|-------------------------------|-------------------------|
| ATIS<br><b>120.675 327.05</b> | ALPENA APP CON ★<br><b>128.425 379.3</b> | ALPENA TOWER ★<br><b>121.35 (CTAF) 0 318.1</b> | GND CON<br><b>121.9 275.8</b> | UNICOM<br><b>122.95</b> |
|-------------------------------|------------------------------------------|------------------------------------------------|-------------------------------|-------------------------|

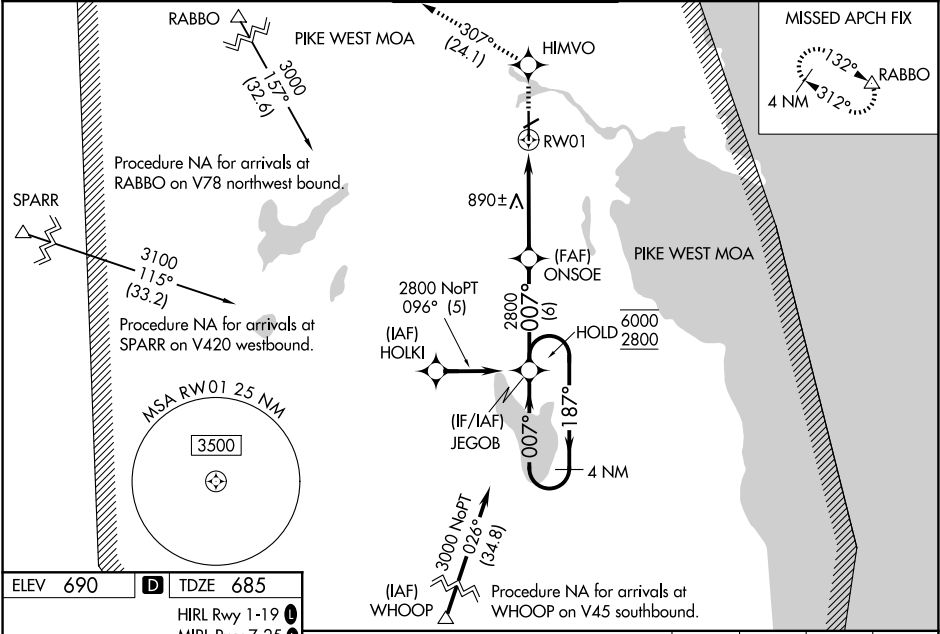

|                                |                   |
|--------------------------------|-------------------|
| ELEV 690                       | <b>D</b> TDZE 685 |
| HIRL Rwy 1-19 <b>0</b>         |                   |
| MIRL Rwy 7-25 <b>0</b>         |                   |
| REIL Rws 7, 19 and 25 <b>0</b> |                   |

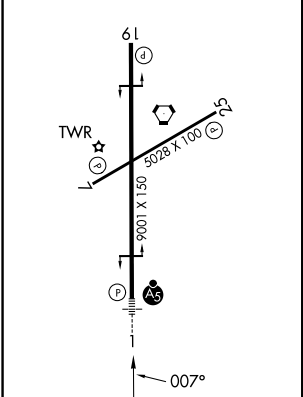

|                      |                     |       |                                         |                |         |       |
|----------------------|---------------------|-------|-----------------------------------------|----------------|---------|-------|
| 4 NM Holding Pattern | JEGOB               | ONSOE | 3500                                    | HIMVO          | tr 307° | RABBO |
| 6000 2800            | 187°                | 007°  | 2800                                    | 1.3 NM to RW01 | RW01    |       |
| GP 3.00° TCH 52      | 2800                | 6 NM  | 5 NM                                    | 1.3            |         |       |
| CATEGORY             | A                   | B     | C                                       | D              |         |       |
| LPV DA               | 974-1½              |       | 289 (300-½)                             |                |         |       |
| LNAV/VNAV DA         | 1029-¾              |       | 344 (400-¾)                             |                |         |       |
| LNAV MDA             | 1160-1½ 475 (500-½) |       | 1160-1 475 (500-1)                      |                |         |       |
| CIRCLING             | 1160-1 470 (500-1)  |       | 1220-1½ 530 (600-1½) 1300-2 610 (700-2) |                |         |       |

EC-1, 06 AUG 2026 to 03 SEP 2026

EC-1, 06 AUG 2026 to 03 SEP 2026