WAAS	APP CRS	Rwy Ldg	6001
CH 90503	190°	TDZE	19
W19A		Apt Elev	19

RNAV (GPS) RWY 19

NORTHEASTERN RGNL (EDE)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 19 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using ECG altimeter setting. When local altimeter setting not received, use ECG altimeter setting and increase LPV DA to 276 feet; increase LNAV/VNAV DA to 355 feet and all visibilities ⅛ SM. Increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM. VDP NA with ECG altimeter setting.

MISSED APPROACH: Climb to 600 then climbing right turn to 2500 direct IDWAP and hold.

AWOS-3	WASHINGTON CENTER	UNICOM
118.275	123.85 279.65	123.0 (CTAF)

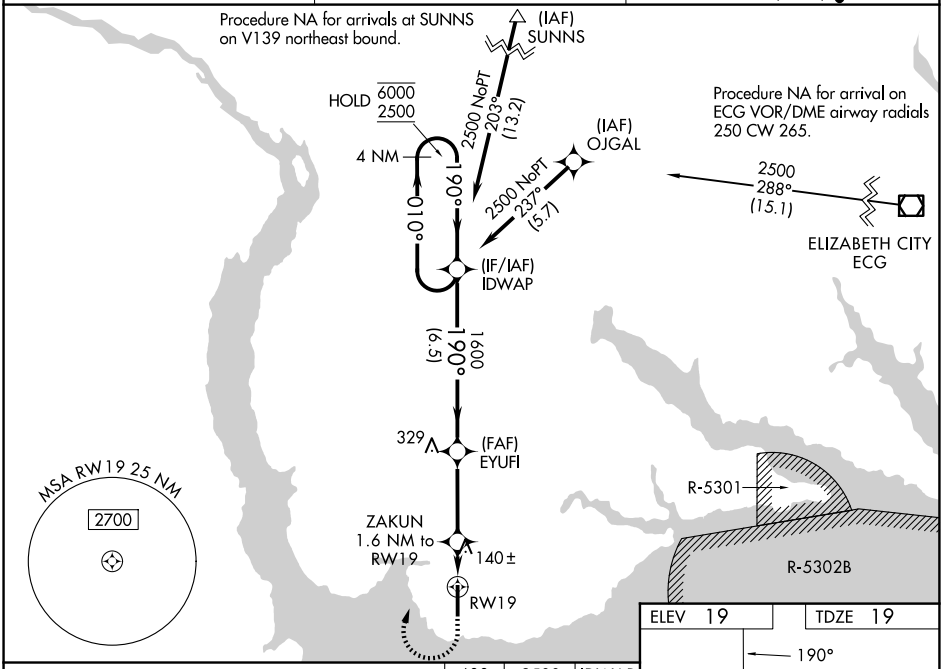

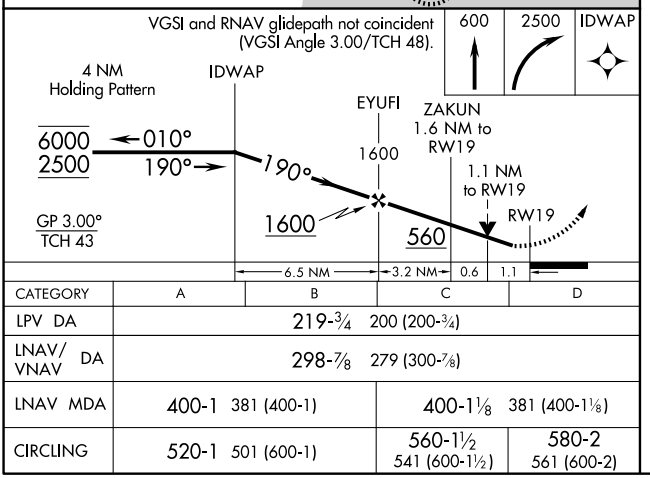

CATEGORY	A	B	C	D
LPV DA	219-¾ 200 (200-¾)			
LNAV/VNAV DA	298-⅞ 279 (300-⅞)			
LNAV MDA	400-1 381 (400-1)		400-1⅛ 381 (400-1⅛)	
CIRCLING	520-1 501 (600-1)		560-1½ 541 (600-1½)	580-2 561 (600-2)

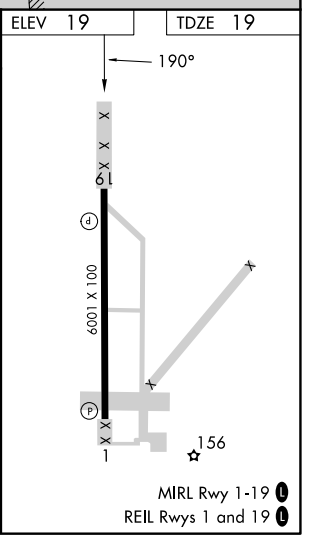

SE-2, 06 AUG 2026 to 03 SEP 2026
SE-2, 06 AUG 2026 to 03 SEP 2026