
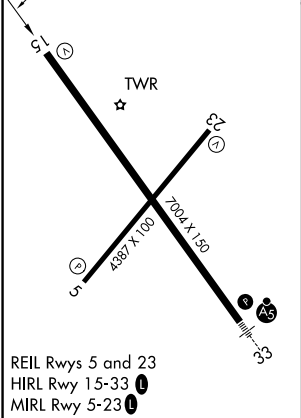


|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>53513</b><br><b>W15A</b> | APP CRS<br><b>154°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>6698</b><br><b>2276</b><br><b>2284</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 15

JOHN MURTHA JOHNSTOWN/CAMBRIA COUNTY (JST)

|                        |                                           |                                                       |                         |
|------------------------|-------------------------------------------|-------------------------------------------------------|-------------------------|
| RNP APCH - GPS.        |                                           | MISSED APPROACH: Climb to 4900 direct COTSO and hold. |                         |
| Baro-VNAV NA.          |                                           |                                                       |                         |
| ATIS<br><b>118.325</b> | JOHNSTOWN APP CON ★<br><b>121.2 299.2</b> | JOHNSTOWN TOWER ★<br><b>125.75</b> (CTAF) <b>0</b>    | GND CON<br><b>121.6</b> |
|                        |                                           | UNICOM<br><b>122.95</b>                               |                         |

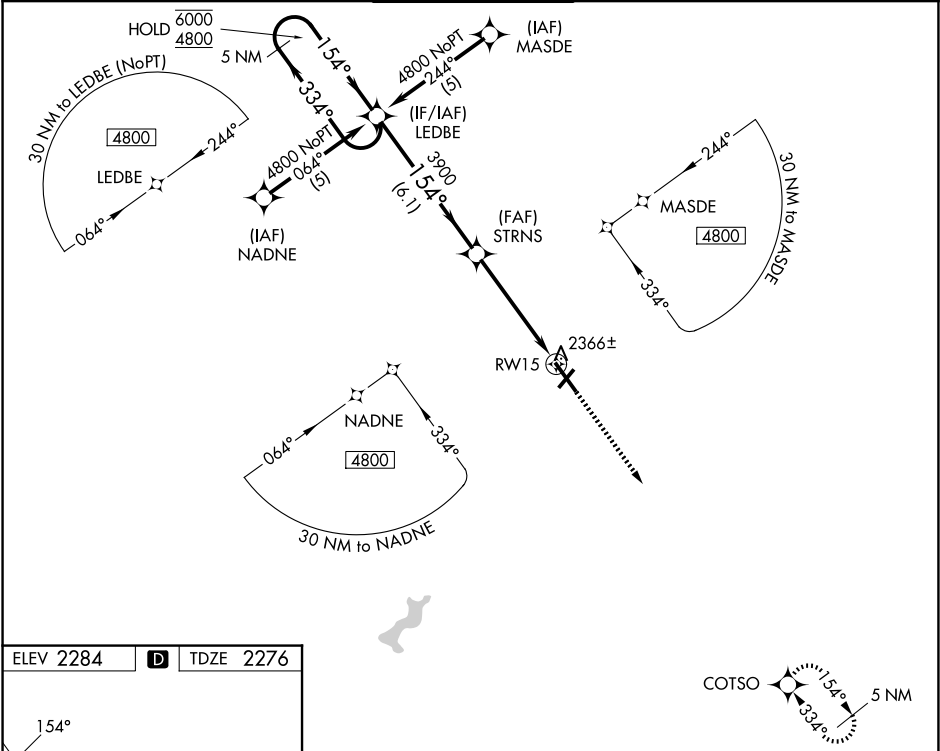

|                            |                       |                       |                               |                               |  |             |  |
|----------------------------|-----------------------|-----------------------|-------------------------------|-------------------------------|--|-------------|--|
| 5 NM Holding Pattern       |                       | LED BE                |                               | 4900                          |  | COTS O      |  |
| 6000 ← 334°<br>4800 → 154° |                       | STR NS                |                               | 3900                          |  | * LNAV only |  |
| GP 3.00°<br>TCH 52         |                       | 3900                  |                               | * 1.1 NM to RW15              |  | RW15        |  |
|                            |                       | 6.1 NM                |                               | 3.8 NM                        |  | 1.1         |  |
| CATEGORY                   | A                     | B                     | C                             | D                             |  |             |  |
| LPV DA                     | 2526-3/4              |                       | 250 (300-3/4)                 |                               |  |             |  |
| LNAV/ VNAV DA              | 2595-1                |                       | 319 (400-1)                   |                               |  |             |  |
| LNAV MDA                   | 2680-1                | 404 (400-1)           | 2680-1 1/8<br>404 (400-1 1/8) | 2680-1 1/4<br>404 (400-1 1/4) |  |             |  |
| CIRCLING                   | 2700-1<br>416 (500-1) | 2880-1<br>596 (600-1) | 2880-1 1/2<br>596 (600-1 1/2) | 3000-2 1/4<br>716 (800-2 1/4) |  |             |  |