

TACAN NTU Chan 113	APCH CRS 309°	Rwy Idg	32L 8000	32R 8001
		TDZE	32L 22	32R 20
		Arpt Elev	22	

[USN]

OCEANA NAS (APOLLO SOUCEK FLD) (KNTU)

TACAN Y RWY 32L/R

ALSF-1

(A1)


* When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1¼ miles.

MISSED APPROACH: Climbing left turn to 3000, intercept NTU TACAN R-223 to GRAIT and hold.

ATIS 317.6	APP/DEP CON 123.9 266.8	TOWER 127.075 360.2	GND CON 119.6 336.4	ASR/PAR
---------------	----------------------------	------------------------	------------------------	---------

Knots	60	120	180	240	300	360
V/V(fpm)	220	440	660	880	1100	1320
ATC climb of 220 ft/NM to 3000						

CAUTION:
Rwy 32L final approach crs 171° from rwy cntrln at 3000' from thld.
Rwy 32R final approach crs 528° from rwy cntrln at 3000' from thld.

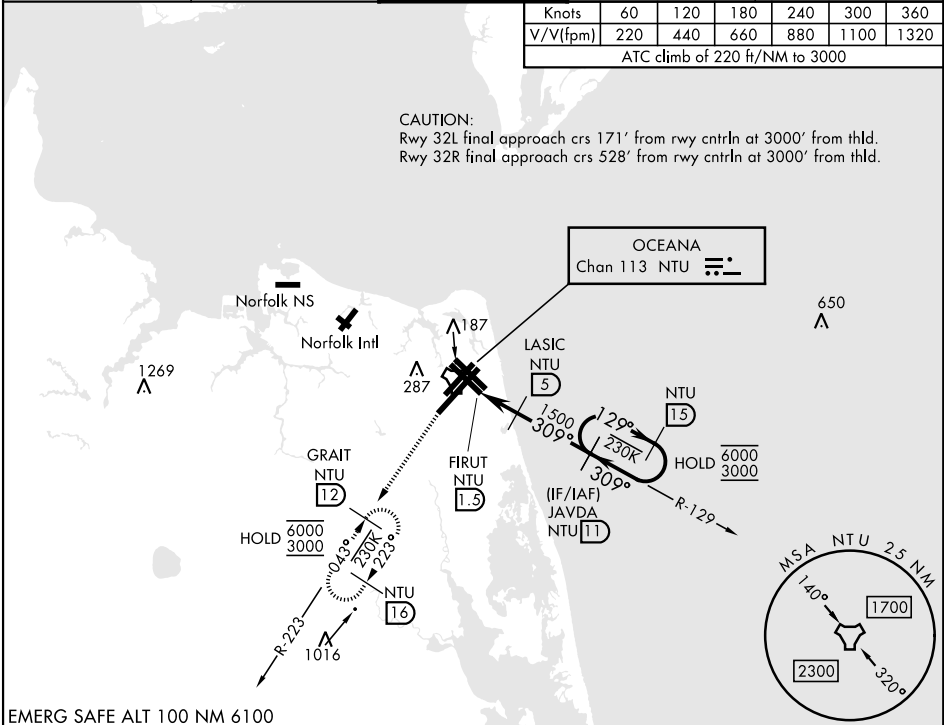

EMERG SAFE ALT 100 NM 6100

ELEV 22

TDZE 32L 22

TDZE 32R 20

This diagram shows the final approach for RWY 32L and RWY 32R. It includes:
- **Altitudes**: 3000, 1500, 6000, 3000.
- **Angles**: 309°, 129°, 309°.
- **Distances**: 3.5 NM, 3.31, 3.33.
- **Obstacles**: 799' x 150', 1200' x 250'.
- **Communication**: Frequencies for TACAN, Tower, and Unicom.

CATEGORY	A	B	C	D
S-32L *	460-1/2	438 (500-1/2)	460-3/4	438 (500-3/4)
S-32R	460-1	440 (500-1)	460-1 1/4	440 (500-1 1/4)
CIRCLING	500-1	478 (500-1)	600-1 1/2 578 (600-1 1/2)	600-2 578 (600-2)

HIRL all rwy's
Wave-Off Lgt all rwy's

TACAN Y RWY 32L/R

NE-3, 06 AUG 2026 to 03 SEP 2026

NE-3, 06 AUG 2026 to 03 SEP 2026