

WAAS CH 42832 W20A	APP CRS 203°	Rwy Ldg TDZE Apt Elev	3997 339 342
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 20



CAPE GIRARDEAU RGNL (CGI)

RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. Rwy 20 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using CIR altimeter setting. When local altimeter setting not received, use CIR altimeter setting and increase LPV DA to 637 feet. Increase LNAV/VNAV DA to 652 feet; increase all MDAs 60 feet and LNAV and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3000 direct ZUGUB and hold, continue climb-in-hold to 3000.

ASOS 120.55	MEMPHIS CENTER 133.65 292.15	CAPE GIRARDEAU TOWER ★ 125.525 (CTAF) 0	GND CON 124.7	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

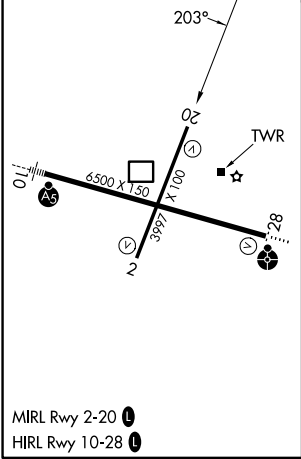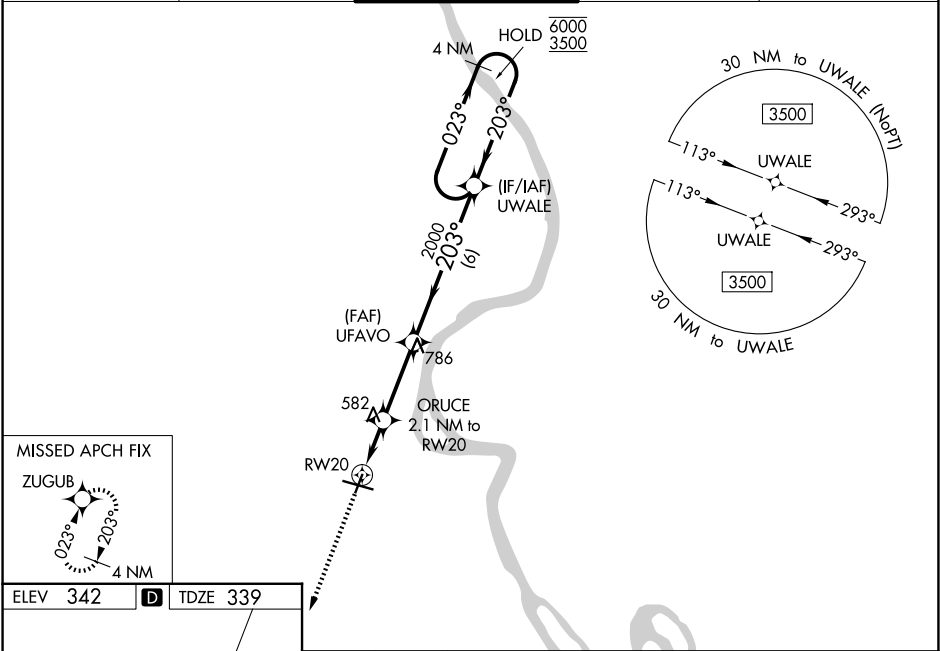

	3000	ZUGUB	ORUCE	UFAVO	UWALE	4 NM Holding Pattern
			2.1 NM to RW20	2000		
			1.4 NM to RW20	1040	2000	
			1.4 NM	0.7	3 NM	6 NM
CATEGORY	A	B	C	D		
LPV DA	589-1		250 (300-1)			
LNAV/VNAV DA	604-1		265 (300-1)			
LNAV MDA	840-1		501 (500-1)		840-1⅓	501 (500-1⅓)
CIRCLING	880-1		960-1		1000-1¾	1080-2¼
	538 (600-1)		618 (700-1)		658 (700-1¾)	738 (800-2¼)