

WAAS CH 90199 W28A	APP CRS 288°	Rwy Ldg TDZE 341 Apt Elev 342
--	------------------------	---

RNAV (GPS) RWY 28

CAPE GIRARDEAU RGNL (CGI)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. Baro-VNAV and VDP NA when using CIR altimeter setting. Rwy 28 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LNAV/VNAV all Cats and LNAV Cats A and B. For inop ALS, increase LPV Cat A and B visibility to 1½ SM. When local altimeter setting not received, use CIR altimeter setting and increase LPV DA to 771 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 896 feet; increase all MDAs 60 feet and LNAV and Circling visibility Cat C/D ¼ SM.

ODALS

MISSED APPROACH:
Climb to 3000 direct
IYIGO and hold,
continue climb-in-hold
to 3000.

ASOS 120.55	MEMPHIS CENTER 133.65 292.15	CAPE GIRARDEAU TOWER ★ 125.525 (CTAF)	GND CON 124.7	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

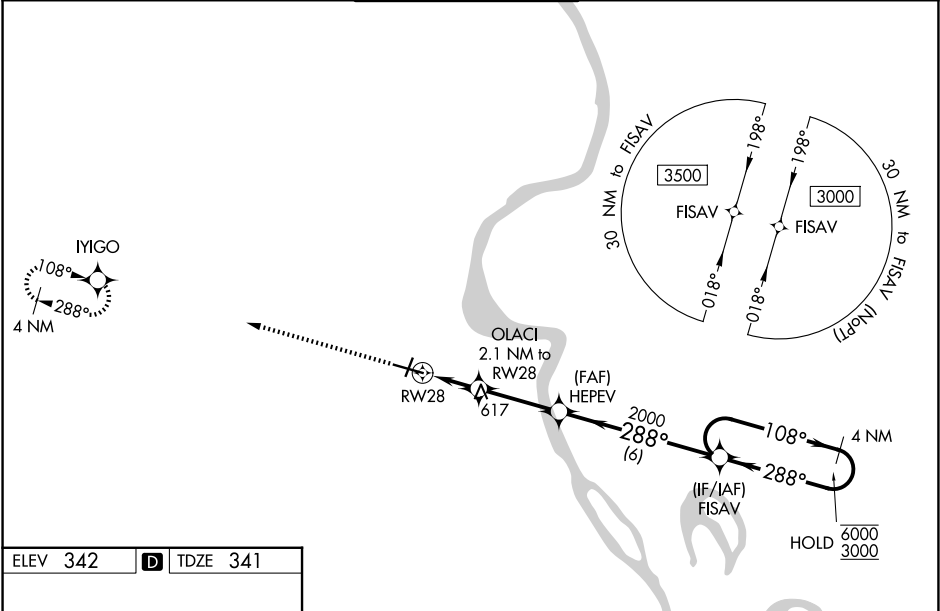

ELEV 342 TDZE 341

MIRL Rwy 2-20
HIRL Rwy 10-28

	3000	IYIGO	OLACI 2.1 NM to RW28	HEPEV 2000	FISAV 4 NM Holding Pattern	6000 3000	GP 3.00° TCH 38
			1.6 NM to RW28	0.5 NM	3 NM	6 NM	
CATEGORY	A	B	C	D			
LPV DA	723-1 382 (400-1)						
LNAV/ VNAV DA	848-1¾ 507 (600-1¾)						
LNAV MDA	880-1	539 (600-1)	880-1¾	539 (600-1¾)			
CIRCLING	880-1 538 (600-1)	960-1 618 (700-1)	1000-1¾ 658 (700-1¾)	1080-2¼ 738 (800-2¼)			

NC-3, 06 AUG 2026 to 03 SEP 2026

NC-3, 06 AUG 2026 to 03 SEP 2026