

WAAS CH 48940 W13A	APP CRS 129°	Rwy Ldg TDZE 54 Apt Elev 55
--	------------------------	---

RNAV (GPS) RWY 13

KNOX COUNTY RGNL (RKD)

▼



▲

DME/DME RNP -0.3 NA. VDP and Baro-VNAV NA when using Wiscasset altimeter setting. When local altimeter setting not received, use Wiscasset altimeter setting and increase LPV DA to 319 feet, LNAV/VNAV DA to 467 feet and all MDA 80 feet. Increase LNAV/VNAV visibility all Cats to 1 SM, LNAV Cat C/D to 1 SM and Circling Cat C to 2 ¼ SM. For inop ALS when using Wiscasset altimeter setting increase LPV all Cats visibility to 7⁄8 SM, LNAV/VNAV all Cats visibility to 1 3⁄8 SM and LNAV Cat C/D to 1 3⁄8 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).

MALSR

MISSED APPROACH:
Climb to 800 then
climbing right turn to
2400 direct AVMAW
and hold.

AWOS-3PT 119.025	PORTLAND APP CON ★ 120.4 299.2	CLNC DEL 123.8	UNICOM 123.05 (CTAF) 0
----------------------------	--	--------------------------	----------------------------------

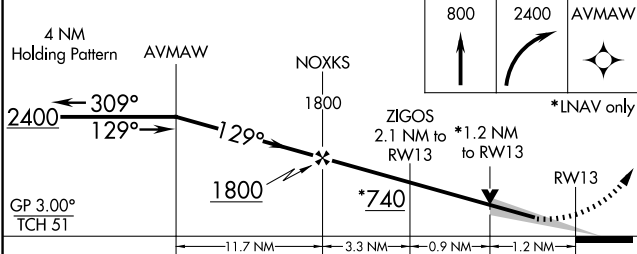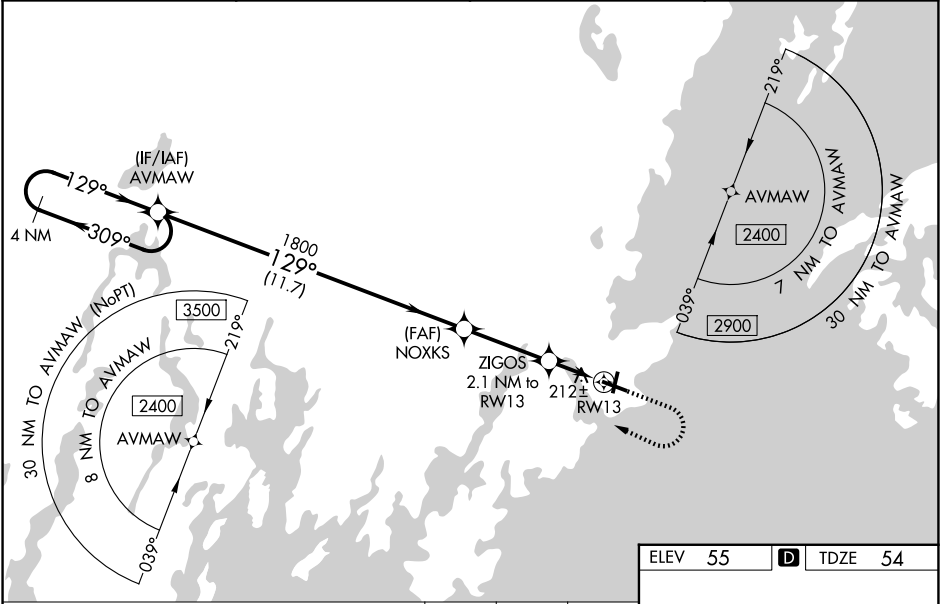

CATEGORY	A	B	C	D
LPV DA		254-1⁄2	200 (200-1⁄2)	
LNAV/VNAV DA		402-3⁄4	348 (400-3⁄4)	
LNAV MDA	480-1⁄2	426 (500-1⁄2)	480-3⁄4	426 (500-3⁄4)
CIRCLING	580-1	525 (600-1)	720-1 3⁄4 665 (700-1 3⁄4)	1140-3 1085 (1100-3)

ELEV 55 D TDZE 54

REIL Rwy 3 and 31 0
MRL Rwy 3-21 0
HIRL Rwy 13-31 0