
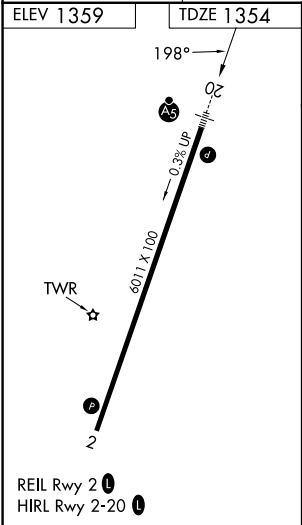


WAAS CH 40003 W20A	APP CRS 198°	Rwy Ldg TDZE 1354 Apt Elev 1359
--	------------------------	---

RNAV (GPS) RWY 20
ROGERS EXEC - CARTER FLD (R.O.G)

RNP APCH-GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.	MALSR 	MISSED APPROACH: Climb to 3100 direct HONON and hold.
---	-----------	---

AWOS-3PT 134.375	RAZORBACK APP CON ★ 126.6 305.2	ROGERS TOWER ★ 119.375 (CTAF) 0	GND CON 118.0
----------------------------	---	---	-------------------------

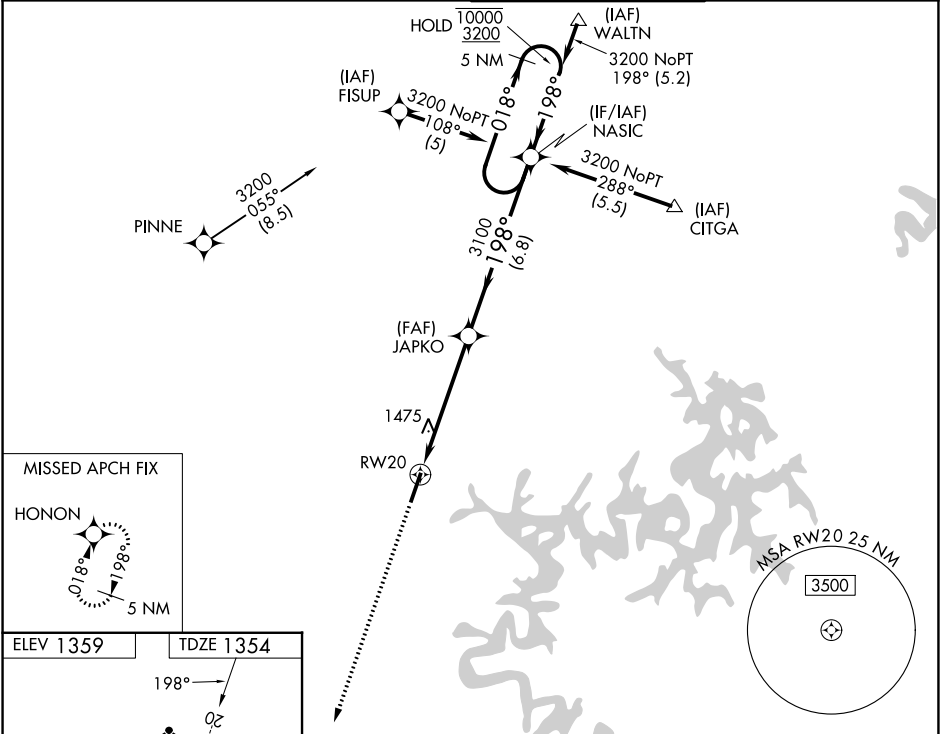

3100	HONON	VGSI and RNAV glidepath not coincident (VGSI angle 3.00°/TCH 55).		5 NM Holding Pattern
1.1 NM to RW20	JAPKO	3100	198°	10000 3200
1.1 NM	4.2 NM	6.8 NM	GP 3.00° TCH 58	
CATEGORY	A	B	C	D
LPV DA		1604-½	250 (300-½)	
LNAV/VNAV DA		1720-⅝	366 (400-⅝)	
LNAV MDA	1740-½	386 (400-½)	1740-⅝	386 (400-⅝)
CIRCLING	1840-1	481 (500-1)	2020-1¾ 661 (700-1¾)	2020-2 661 (700-2)