

WAAS
CH **42528**
W24A

APP CRS
238°

Rwy Ldg **5000**
TDZE **873**
Apt Elev **876**

RNAV (GPS) RWY 24
CUYAHOGA COUNTY (CGT)

▼

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using CLE altimeter setting. When local altimeter setting not received, use CLE altimeter setting and increase LPV DA to 1131 feet; increase LNAV/VNAV DA to 1263 feet and all visibilities 1/8 SM. Increase all MDAs 60 feet and LNAV visibility Cat C/D 1/4 SM, and Circling visibility Cat C/D 1/4 SM. For inop ALS increase LNAV Cat C, D visibility to 1 1/8 SM.

MALSR

AS

MISSED APPROACH:
Climb to 2500 then
climbing left turn to
3000 direct ZUPKO
and hold.

D-ATIS 119.95	CLEVELAND APP CON 125.35 346.325	COUNTY TOWER★ 118.5 (CTAF) 0	GND CON 121.85
-------------------------	--	--	--------------------------

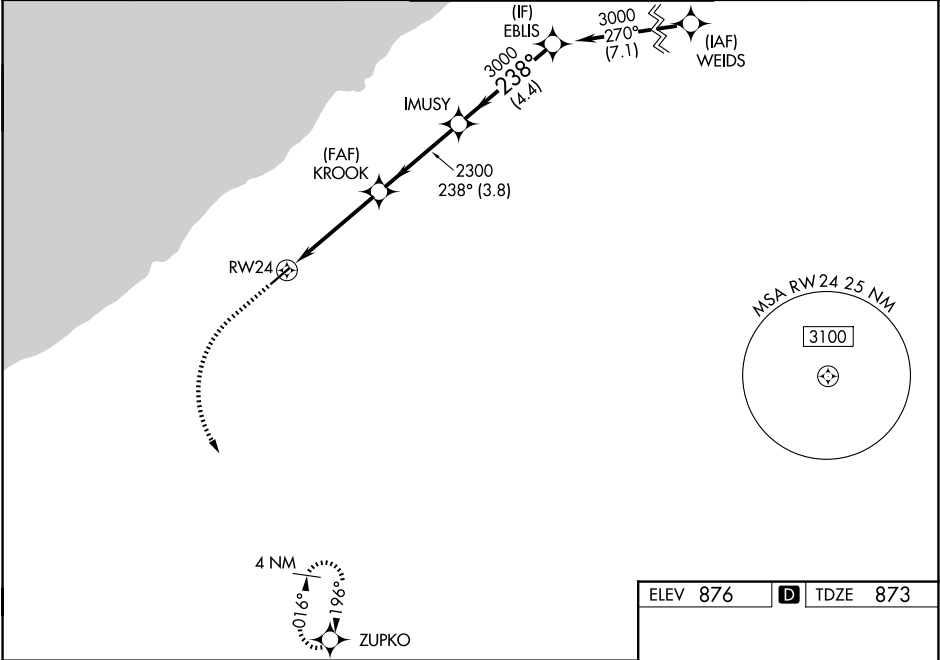

2500

3000

ZUPKO

1.1 NM to RWY24

1.1 NM

3.2 NM

3.8 NM

4.4 NM

IMUSY

EBLIS

2300

3000

238°

GP 3.00°

TCH 44

CATEGORY	A	B	C	D
LPV DA	1073-1/2 200 (200-1/2)			
LNAV/VNAV DA	1205-1/2 332 (400-1/2)			
LNAV MDA	1280-1/2 407 (500-1/2)		1280-3/4 407 (500-3/4)	
CIRCLING	1420-1 544 (600-1)	1500-1 624 (700-1)	1560-2 684 (700-2)	1640-2 1/2 764 (800-2 1/2)

ELEV 876

D

TDZE 873

238°

5502.1100

TWR

REIL Rwy 6 0

HIRL Rwy 6-24 0