ILS or LOC RWY 18

HOUMA-TERREBONNE (HUM)

LOC I-HUM	APP CRS	Rwy Ldg	6143
108.5	179°	TDZE	8
		Apt Elev	9

When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting: increase DA to 285 feet; increase all MDA 80 feet and S-LOC 18 Cat C/D visibility ¼ SM and Circling Cat C/D visibility ¼ SM. For inop ALS increase S-LOC 18 Cat C/D visibility to 1 SM. For inop ALS when using Louis Armstrong New Orleans Intl altimeter setting increase S-ILS 18 all Cats visibility ⅞ SM.

MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 1800 on heading 050° and TBD VOR/DME R-122 to BOURG INT/TBD 16.3 DME and hold.

ATIS	NEW ORLEANS APP CON	HOUMA TOWER★	GND CON	UNICOM
120.25	118.9 350.35	125.3 (CTAF) L 346.3	123.875	122.95

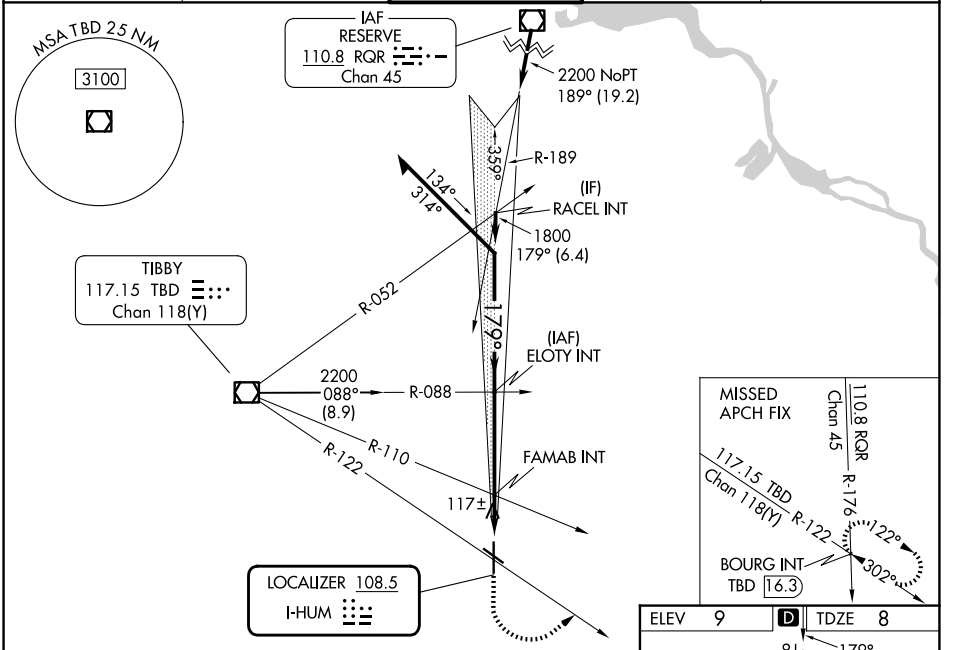

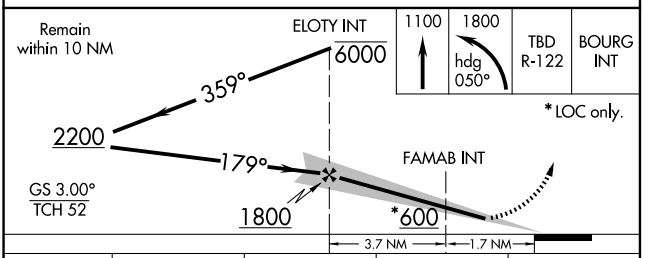

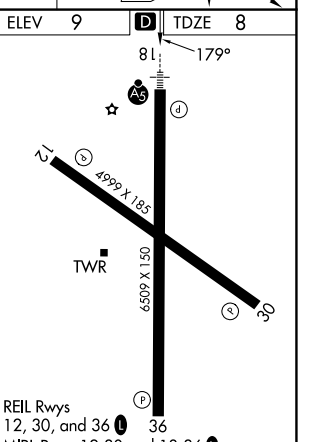

CATEGORY	A	B	C	D
S-ILS 18	208-½ 200 (200-½)			
S-LOC 18	380-½ 372 (400-½)		380-⅝ 372 (400-⅝)	
CIRCLING	480-1 471 (500-1)		760-2¼ 751 (800-2¼)	760-2½ 751 (800-2½)

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

SC-4, 06 AUG 2026 to 03 SEP 2026
SC-4, 06 AUG 2026 to 03 SEP 2026