


WAAS CH 82501 W17A	APP CRS 168°	Rwy Ldg 8002 TDZE 24 Apt Elev 24
--	------------------------	---

RNAV (GPS) RWY 17

ACADIANA RGNL (ARA)

RNP APCH. ▼ Circling NA to Rwy 17W and 35W. Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cats C/D visibility to 1 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C.	ODALS 	MISSED APPROACH: Climb to 480 then climbing left turn to 2000 direct CLYNT and hold.
---	-----------	---

ASOS 133.325	LAFAYETTE APP CON★ 121.1 268.7	ACADIANA TOWER★ 125.0 (CTAF) 0 239.3	GND CON 121.7	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

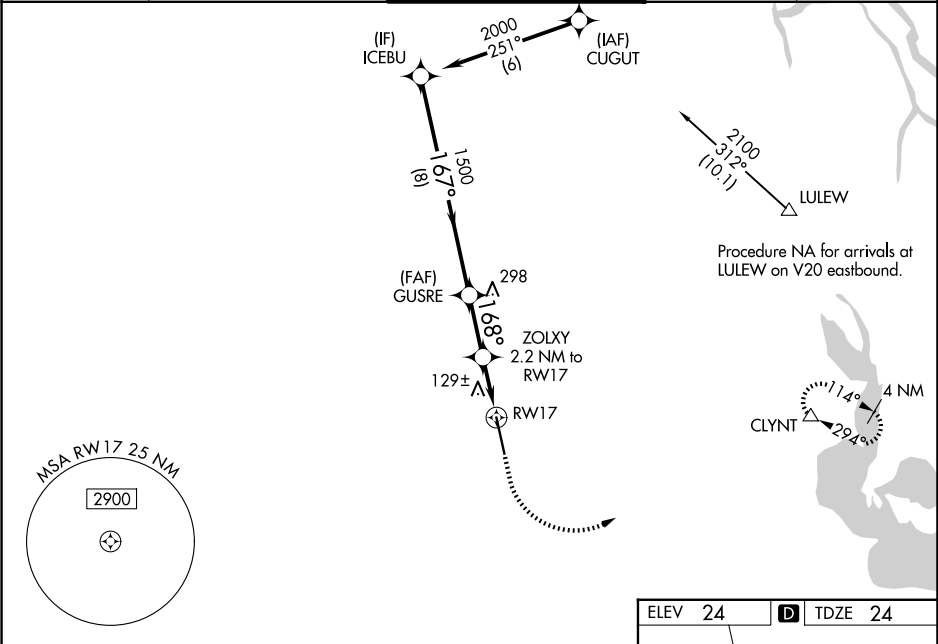

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 51).					ELEV 24	TDZE 24
					168°	
GP 3.00° TCH 51					8002 X 200	
CATEGORY	A	B	C	D	TWR	
LPV DA	274-¾		250 (300-¾)		35	
LNAV/VNAV DA	420-1½		396 (400-1½)		HIRL Rwy 17-35	
LNAV MDA	380-¾	356 (400-¾)	380-⅞	356 (400-⅞)		
CIRCLING	440-1 416 (500-1)	480-1 456 (500-1)	600-1½ 576 (600-1½)	680-2 656 (700-2)		