

WAAS CH 82234 W28A	APP CRS 279°	Rwy Ldg TDZE Apt Elev	5013 1044 1044
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 28
SIDNEY MUNI (SCA)

RNP APCH.

▼ Rwy 28 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA when using James M. Cox Dayton Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. When local altimeter setting not received, use James M. Cox Dayton Intl altimeter setting: increase LPV DA to 1355; increase LNAV/VNAV DA to 1365; increase all MDA 60 feet and LNAV Cat C visibility and Circling Cat C visibility ¼ SM. Straight-in Rwy 28 at night, operational VGSI required, remain at or above VGSI glidepath until threshold.

MISSED APPROACH:
Climb to 3000
direct ZIDNI and
hold.

AWOS-3 120.425	COLUMBUS APP CON 134.45 294.5	UNICOM 123.05 (CTAF) 1
--------------------------	---	---

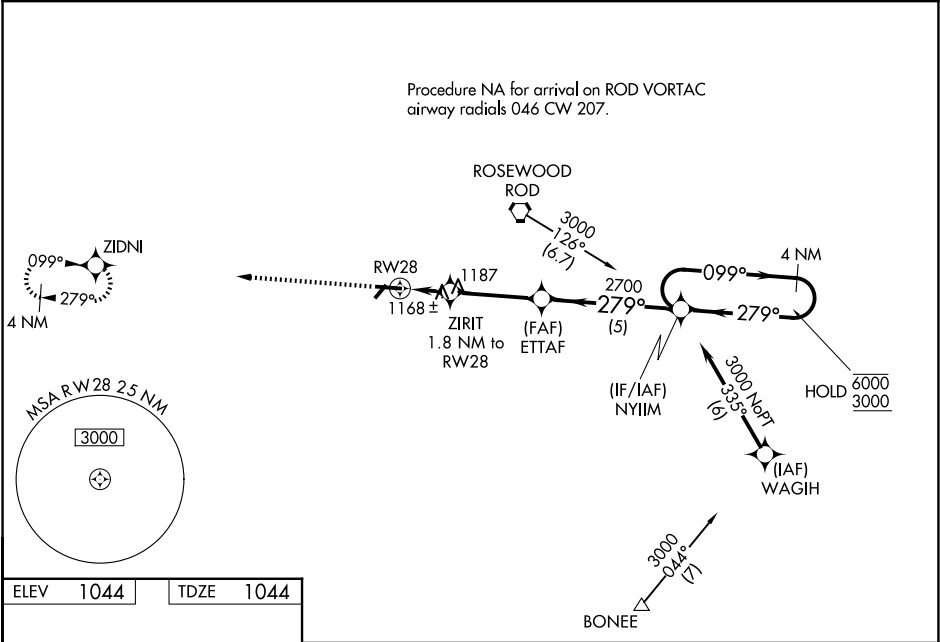

ELEV	1044	TDZE	1044
------	------	------	------

3000	ZIDNI	4 NM	NYIIM	Holding Pattern
* LNAV only.				
ZIRIT 1.8 NM to RW28				
ETADF 2700				
RW28 1640*				
GP 3.00° TCH 36				
1.8 3.3 NM 5 NM				

CATEGORY	A	B	C	D
LPV DA	1302-1 258 (300-1)			NA
LNAV/VNAV DA	1312-1 268 (300-1)			NA
LNAV MDA	1420-1 376 (400-1)			NA
CIRCLING	1460-1 416 (500-1)	1520-1 476 (500-1)	1640-1½ 596 (600-1½)	NA

EC-2, 06 AUG 2026 to 03 SEP 2026

EC-2, 06 AUG 2026 to 03 SEP 2026