| WAAS | APP CRS | Rwy Ldg | 8000 |
|---|---|---|---|
| CH 99303 | 201° | TDZE | 871 |
| W20A | | Apt Elev | 871 |

# RNAV (GPS) RWY 20

## CENTRAL IL RGNL/BLOOMINGTON-NORMAL (BMI)

RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Baro-VNAV and VDP NA when using PIA altimeter setting. When local altimeter setting not received, use PIA altimeter setting: increase LPV DA to 1187 feet and all visibilities to RVR 2400; increase LNAV/VNAV DA to 1417 feet and all visibilites to RVR 6000; increase all MDAs 120 feet and LNAV visibility Cat C and D to RVR 5500 and Circling visibility Cat C and D 1¼ SM. For inop ALS, increase LNAV Cat C and D visibility to RVR 6000. For inop ALS when using PIA altimeter setting, increase LPV all Cats visibility to RVR 4500.

ALSF-2

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct MCLEN and hold.

| ATIS | SAINT LOUIS APP CON | BLOOMINGTON TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 119.575 | 128.725 256.9 | 124.6 (CTAF) L 269.575 | 121.65 | 122.95 |

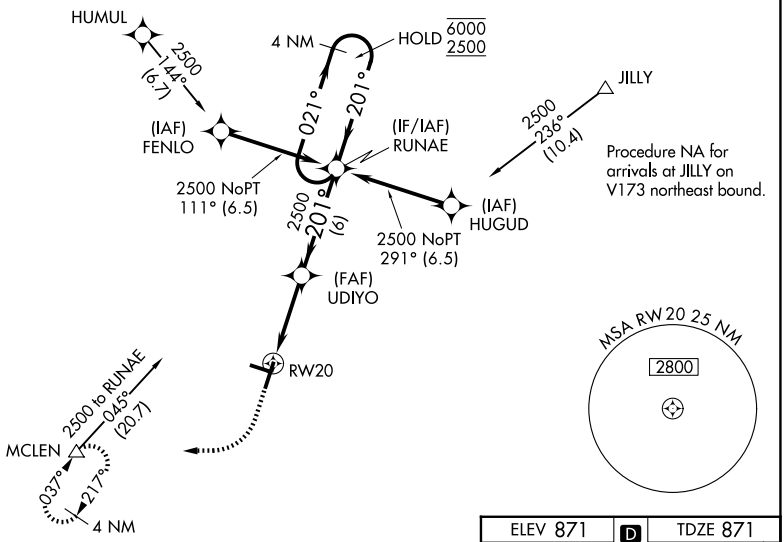


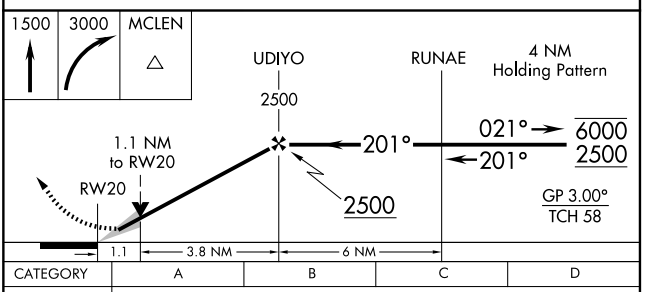


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1071/18 200 (200-½) | | | |
| LNAV/VNAV DA | 1301/40 430 (500-¾) | | | |
| LNAV MDA | 1280/24 409 (500-½) | | 1280/40 409 (500-¾) | |
| CIRCLING | 1340-1 469 (500-1) | | 1620-2¼ 749 (800-2¼) | 1620-2½ 749 (800-2½) |

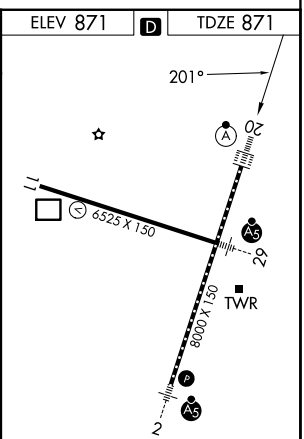


TDZ/CL Rwy 20 L
HIRL Rwys 2-20 and 11-29 L



EC-3, 06 AUG 2026 to 03 SEP 2026
EC-3, 06 AUG 2026 to 03 SEP 2026