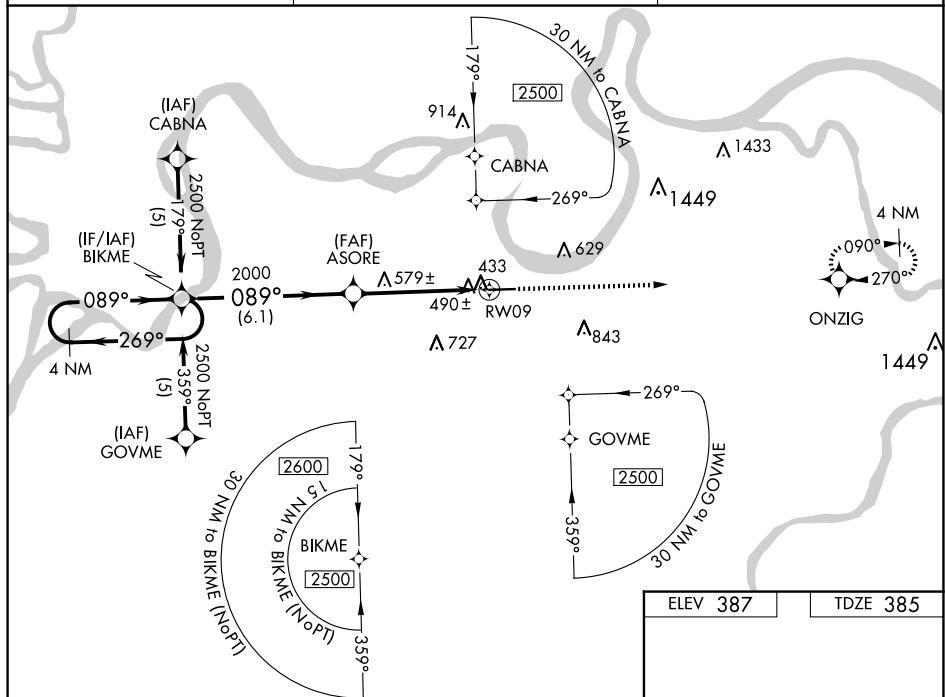


RNAV (GPS) RWY 9

HENDERSON CITY-COUNTY (EHR)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48° C.
A Rwy 9 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Evansville altimeter setting. When local altimeter setting not received, use Evansville altimeter setting and increase all DA 41 feet and all MDA 60 feet and LPV all Cats, LNAV/VNAV all Cats and LNAV Cats C/D visibilities ¼ mile.



MISSED APPROACH:
Climb to 2500 direct
ONZIG and hold.

UNICOM
122.8 (CTAF) **L**

VGSI and descent angles not coincident
(VGSI Angle 3.00/TCH 43).

2500
↑

ONZIG

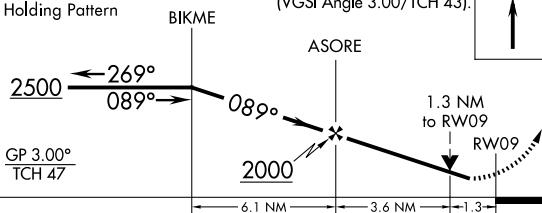

CATEGORY		A	B	C	D
LPV	DA	694-1 309 (400-1)			
LNAV/ VNAV	DA	774-1¼ 389 (400-1¼)			
LNAV	MDA	840-1 455 (500-1)	840-1⅝ 455 (500-1⅝)	840-1½ 455 (500-1½)	

REIL Rwy 9 and 27 **L**
MIRL Rwy 9-27 **L**

SE-1, 06 AUG 2026 to 03 SEP 2026