

LOC/DME I-ONA 109.35 Chan 30 (Y)	APP CRS 300°	Rwy Ldg TDZE 656 Apt Elev 656
--	------------------------	---

ILS Y or LOC Y RWY 30
WINONA MUNI/MAX CONRAD FLD (ONA)


DME required.

VDP NA with La Crosse altimeter setting. When local altimeter setting not received, use La Crosse altimeter setting and increase S-ILS 30 DA to 1127 and all visibilities 1/8 mile, increase all MDA 60 feet, and visibility S-ILS 30 Cat C/D 1/8 mile, and Circling Cat B 1/4 mile. For inop ALS, increase S-ILS 30 all Cats visibility to 1 1/8 mile, increase S-LOC 30 Cats C/D visibility to 1 1/8 mile. For inop ALS when using La Crosse altimeter setting, increase S-ILS 30 all Cats visibility to 1 1/8 mile, increase S-LOC 30 Cats C/D visibility to 1 1/4 mile.

MALSR

MISSED APPROACH:
Climb to 1800 then climbing left turn to 3000 on RST VOR/ DME R-056 to VUZID INT and hold.

AWOS-3 118.075	MINNEAPOLIS CENTER 128.6 363.0	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

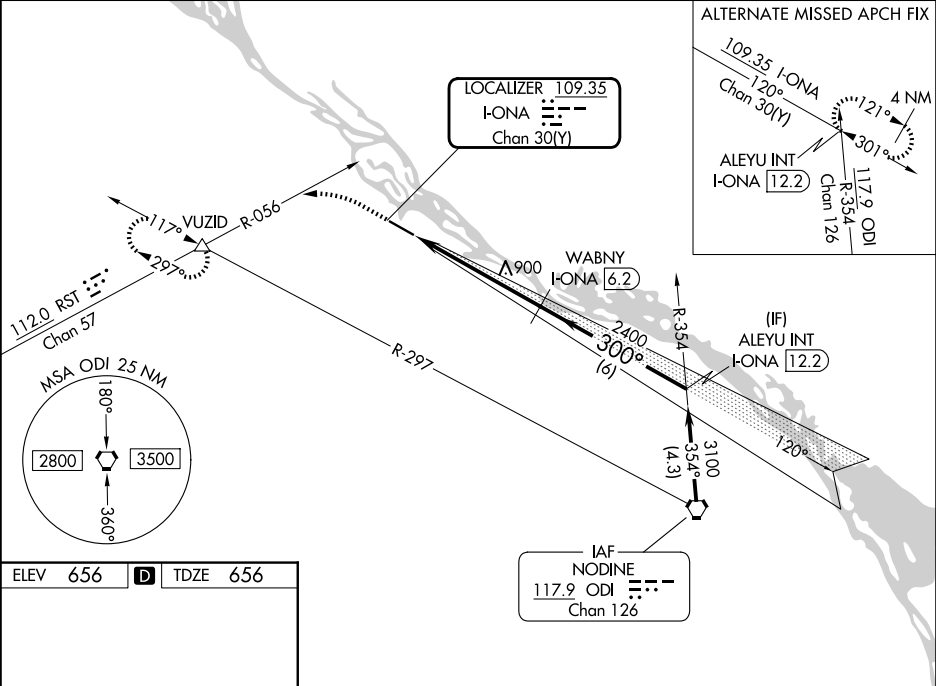

ELEV 656	D	TDZE 656
-----------------	----------	-----------------

1800	3000	VUZID		
↑	RST R-056	△		
*LOC only				
I-ONA 0.9	*I-ONA 2.5			
1.6 NM 3.7 NM 6 NM				
WABNY I-ONA 6.2				
ALEYU INT I-ONA 12.2				
2400 3100				
300°				
GS 3.00° TCH 50				
CATEGORY	A	B	C	D
S-ILS 30	1074-1 1/8 418 (500-1 1/8)			
S-LOC 30	1220-1/2 564 (600-1/2)		1220-1/4 564 (600-1 1/4)	
CIRCLING	1560-1 1/4 904 (1000-1 1/4)	1600-1 1/4 944 (1000-1 1/4)	1780-3 1124 (1200-3)	1980-3 1324 (1400-3)