

WAAS CH 53706 W13A	APP CRS 133°	Rwy Ldg 7400 TDZE 1184 Apt Elev 1184
--	------------------------	---

RNAV (GPS) RWY 13

FALLS INTL/EINARSON FLD (INTL)

RNP APCH - GPS.

T

A


Circling Rwy 4, 22 NA at night. Baro-VNAV and VDP NA when using BDE altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility Cats C and D to 1½ SM. When local altimeter setting not received, use BDE altimeter setting and increase LPV DA to 1561 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1796 feet and all visibilities ¾ SM. Increase all MDAs 140 feet and LNAV visibility Cat C/D ½ SM.

MALSR

A5

MISSED APPROACH:
Climb to 3400 direct ZAVBA and hold.

ASOS 120.0	MINNEAPOLIS CENTER 120.9 377.1	UNICOM 122.8 (CTAF)
----------------------	--	-------------------------------

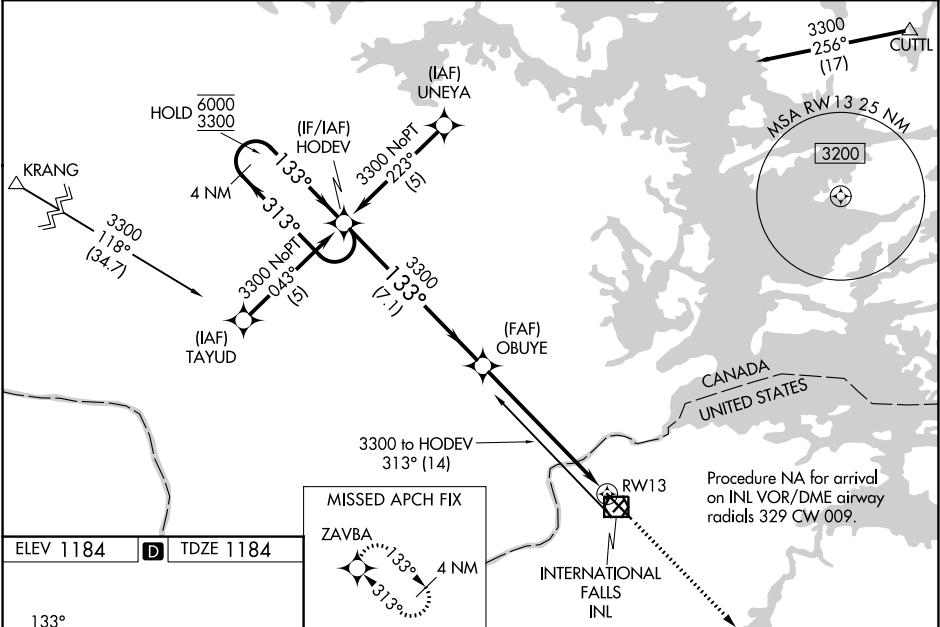

ELEV 1184

D

TDZE 1184

133°

22

7400 X 150

0.4% Up

2099 X 175

HIRL Rwy 13-31

4 NM Holding Pattern

HODEV

OBUYE

3400

ZAVBA

6000

3300

313°

133°

133°

3300

2.9 NM to RW13

7.1 NM

3.5 NM

2.9

GP 3.00°

TCH 50

CATEGORY	A	B	C	D
LPV DA		1434-½	250 (300-½)	
LNAV/VNAV DA		1669-1	485 (500-1)	
LNAV MDA	2160-¾ 976 (1000-¾)	2160-1 976 (1000-1)	2160-2½	976 (1000-2½)
CIRCLING	2160-1¼ 976 (1000-1¼)	2160-1½ 976 (1000-1½)	2160-3	976 (1000-3)