

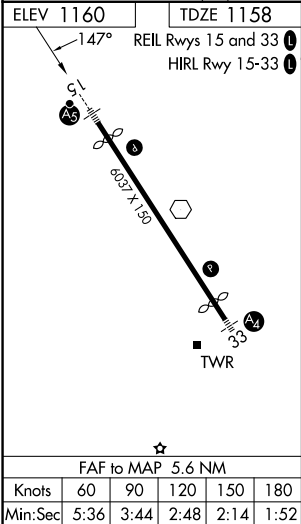
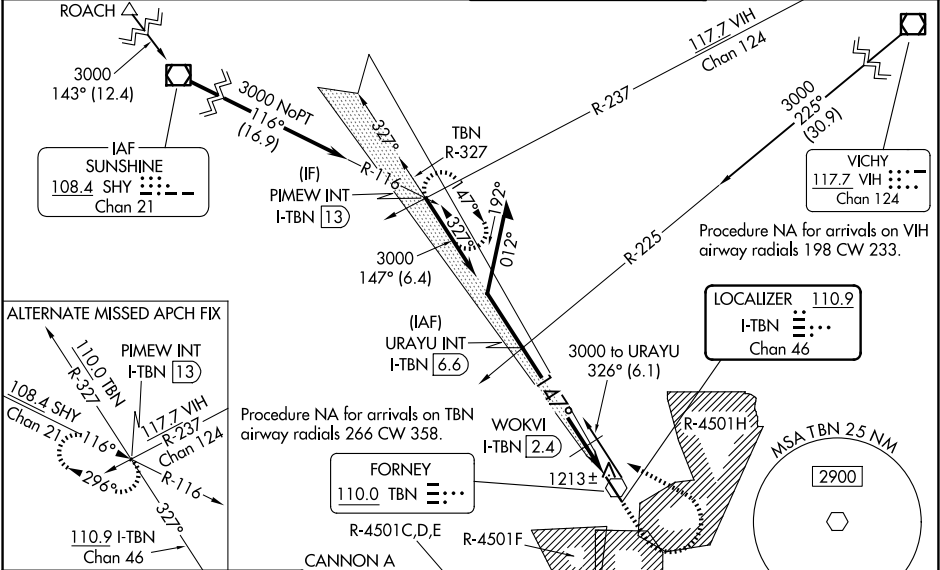
LOC/DME I-TBN 110.9 Chan 46	APP CRS 147°	Rwy Ldg 5535 TDZE 1158 Apt Elev 1160	ILS or LOC RWY 15 WAYNESVILLE-ST ROBERT RGNL FORNEY FLD (TBN)
---	------------------------	---	--





⚠ Circling NA west of Rwy 15-33. For inop ALS increase S-LOC 15 Cats C/D visibility to 1½ SM. When local altimeter setting not received, use Rolla Nil altimeter setting and increase DA to 1427 feet; and all MDAs 80 feet, increase S-LOC 15 Cat C/D and Circling Cat C visibility ¼ SM and WOKVI fix minimums S-LOC 15 Cat C/D and Circling Cat C visibility ¼ SM. VDP NA when using Rolla Nil altimeter setting. For inop ALS when using Rolla Nil altimeter setting increase S-LOC 15 WOKVI fix minimums Cats C/D visibility to 1¼ SM. Inop table does not apply to S-ILS 15, S-LOC 15 Cat A/B, and WOKVI fix minimums S-LOC 15.

MALSR

MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 on heading 298° and TBN VOR R-327 to PIMEW INT/I-TBN 13 DME and hold.

D-ATIS 118.7 229.4	KANSAS CITY CENTER 128.35 284.675	FORNEY TOWER★ 125.4 (CTAF) 0 268.7	GND CON 123.75 256.8
------------------------------	---	--	--------------------------------



					
#1740 when using Rolla Nil altimeter setting. Remain within 10 NM		URAYU INT I-TBN 6.6		TBN R-327 PIMEW INT	
		3000		*LOC only.	
GS 3.00° TCH 47		#*1660			
4.2 NM		0.5 NM		0.9 NM	
CATEGORY	A	B	C	D	
S-ILS 15	1358-1		200 (200-1)		
S-LOC 15	1660-1		502 (500-1)		
CIRCLING	1660-1	500 (500-1)	1660-1½ 500 (500-1½)	1720-2 560 (600-2)	
WOKVI FIX MINIMUMS					
S-LOC 15	1500-1		342 (400-1)		
CIRCLING	1580-1 420 (500-1)	1660-1 500 (500-1)	1660-1½ 500 (500-1½)	1720-2 560 (600-2)	