

WAAS CH 90218 W28B	APP CRS 278°	Rwy Ldg TDZE Apt Elev	5001 906 906
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28L

FLYING CLOUD (F^{CM})

RNP APCH.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Minneapolis-St Paul Intl/Wold-Chamberlain altimeter setting and increase all DA 34 feet and all MDA 40 feet, increase LNAV Cats C and D visibility 1⁄8 mile. Helicopters visibility reduction below 3⁄4 SM NA. When Circling to Rwy 18, 36 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

MISSED APPROACH: Climb to 2700 direct ZAMUD and hold.

ATIS 124.9	MINNEAPOLIS APP CON 134.7 284.7	FLYING CLOUD TOWER★ 125.2 (N) 119.15 (S) (CTAF) 0	GND CON 121.7	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

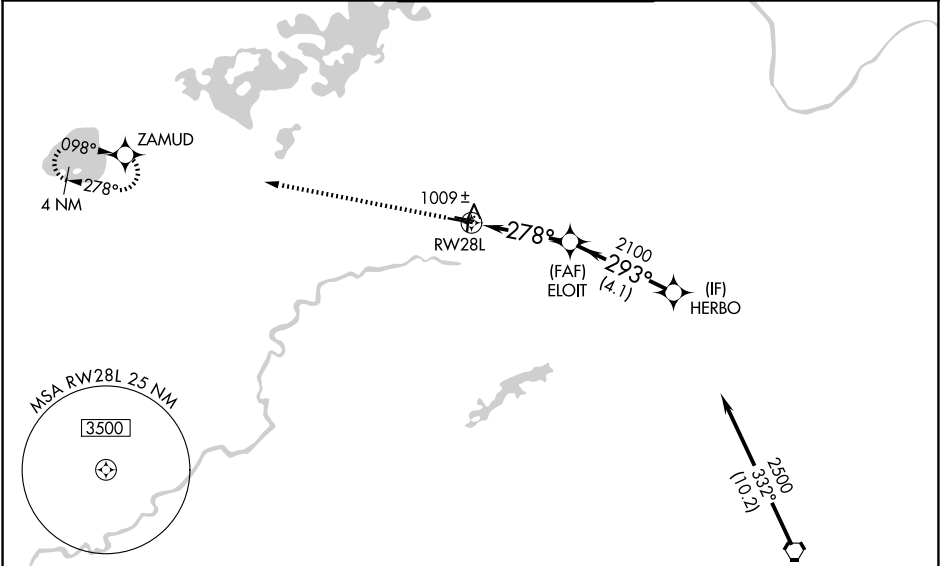

ELEV 906 TDZE 906

HIRL Rwy 10R-28L
REIL Rws 18, 28L, and 36
MIRL Rwy 10L-28R
MIRL Rwy 18-36

Procedure NA for arrivals on FGT VORTAC
airway radials 258 CW 011.

2700	ZAMUD	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 44).		HERBO
		ELOIT	2100	2500
		RW28L	278°	293°
			2100	
			3.6 NM	4.1 NM
CATEGORY	A	B	C	D
LPV DA	1156-1 250 (300-1)			
LNAV/VNAV DA	1198-1 292 (300-1)			
LNAV MDA	1280-1	374 (400-1)	1280-1 1⁄8	374 (400-1 1⁄8)
CIRCLING	1320-1 414 (500-1)	1440-1 534 (600-1)	1440-1 1⁄2 534 (600-1 1⁄2)	1540-2 634 (700-2)

GP 3.00°
TCH 55

NC-1, 06 AUG 2026 to 03 SEP 2026

NC-1, 06 AUG 2026 to 03 SEP 2026