

MHZ VORTAC	APP CRS	Rwy Ldg
113.2	171°	8500
Chan 79		TDZE 312
		Apt Elev 346

VOR/DME or TACAN RWY 16L

JACKSON-MEDGAR WILEY EVERS INTL (JAN)

⚠

ASR



VDP NA with Hawkins Fld altimeter setting. When local altimeter setting not received, use Hawkins Fld altimeter setting and increase all MDA 20 feet; increase S-16L Cats C/D/E visibility to 1¼ mile. For inop ALSF, increase S-16L Cats A/B visibility to 1 mile; Cat E to 1½. For inop ALSF when using Hawkins Fld altimeter setting, increase S-16L Cats A/B visibility to 1 mile, and Cats C/D/E visibility to 1½. Circling NA for Cat E southwest of Rwy 16R-34L. Helicopter visibility reduction below ¾ SM NA.

ALSF-2

A

MISSED APPROACH: Climbing left turn to 3000 on heading 103° and MHZ VORTAC R-134 to RAKIN INT/ MHZ 16.5 DME and hold.

ATIS	JACKSON APP CON ★	JACKSON TOWER ★	GND CON	UNICOM
121.05	123.9 317.7	120.9 (CTAF) 352.0	121.7 348.6	122.95

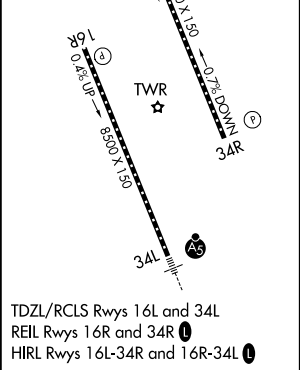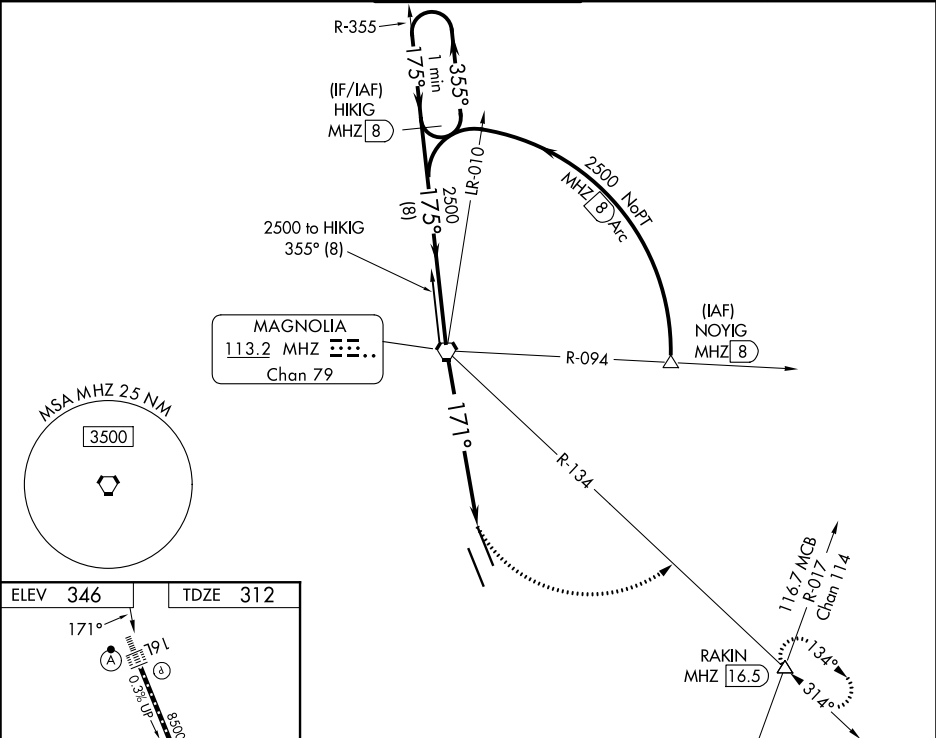

One Minute Holding Pattern		HIKIG MHZ 8	MHZ VORTAC	3000 hdg 103°	MHZ R-134	RAKIN △
2500		355° 175°	175° 171°	3.11° TCH 71	MHZ 4.9	MHZ 6.4
		8 NM	4.9 NM	1.5		
CATEGORY	A	B	C	D	E	
S-16L	860/40	548 (600-¾)	860/60	548 (600-1¼)		
CIRCLING	880-1 534 (600-1)	900-1 554 (600-1)	900-1½ 554 (600-1½)	960-2 614 (700-2)	1040-2½ 694 (700-2½)	

SC-4, 06 AUG 2026 to 03 SEP 2026

SC-4, 06 AUG 2026 to 03 SEP 2026