



WAAS CH 40241 W35A	APP CRS 355°	Rwy Ldg TDZE Apt Elev	6325 1094 1114
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

HALLIBURTON FLD (DUC)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.	MISSED APPROACH: Climb to 3000 direct CEPAC and hold.
---	---

AWOS-3 119.075	FORT SILL APP CON 118.6 290.375	CLNC DEL 118.4	UNICOM 122.8 (CTAF) 0
--------------------------	---	--------------------------	--

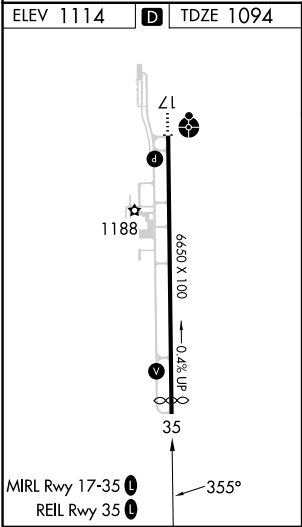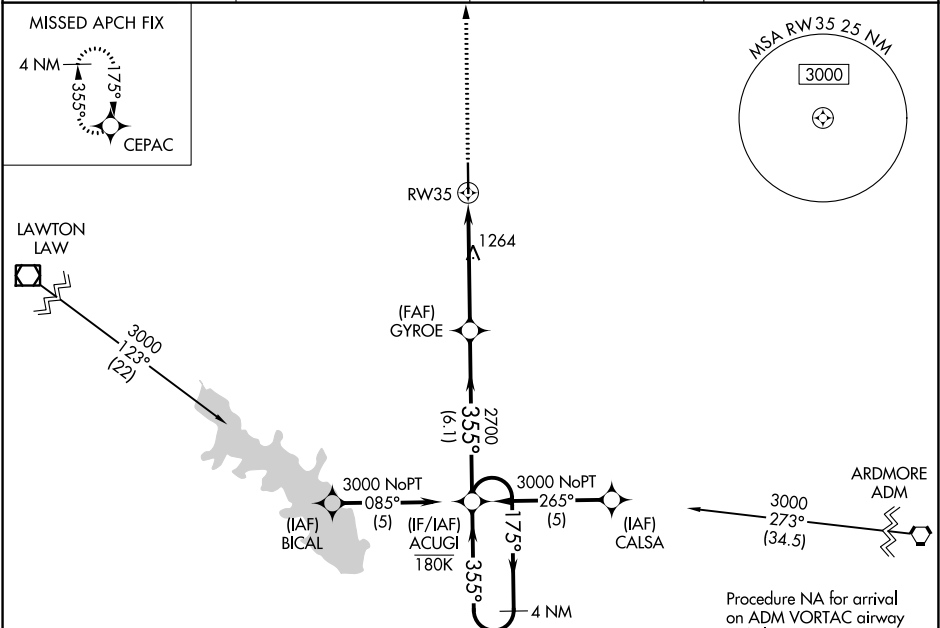

3000

↑

CEPAC

ACUGI

4 NM Holding Pattern

*LNAV only.

1.2 NM to RW35

1.2 NM

3.7 NM

6.1 NM

2700

355°

2700

355°

175°

3000

355°

GP 3.00°

TCH 42

CATEGORY	A	B	C	D
LPV DA	1294-3/4		200 (200-3/4)	
LNAV/VNAV DA	1397-7/8		303 (300-7/8)	
LNAV MDA	1520-1	426 (500-1)	1520-1 1/4	426 (500-1 1/4)
CIRCLING	1560-1	1580-1	1780-1 3/4	1780-2
	446 (500-1)	466 (500-1)	666 (700-1 3/4)	666 (700-2)