RNAV (GPS) RWY 6

WINGS FLD (LOM)

WAAS	APP CRS	Rwy Ldg	3523
CH 42719	065°	TDZE	301
W06A		Apt Elev	302

RNP APCH.

Baro-VNAV NA when using Pottstown altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Pottstown altimeter setting and increase all DA 35 feet and all MDA 40 feet; increase LPV Cats A/B visibility ¼ mile. Rwy 6 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct HOMWE and hold.

AWOS-3	PHILADELPHIA APP CON	CLNC DEL	UNICOM
118.925	126.85 263.125	135.3	123.0 (CTAF) L

Procedure NA for arrival at PTW VORTAC on V403-405 northeast bound.

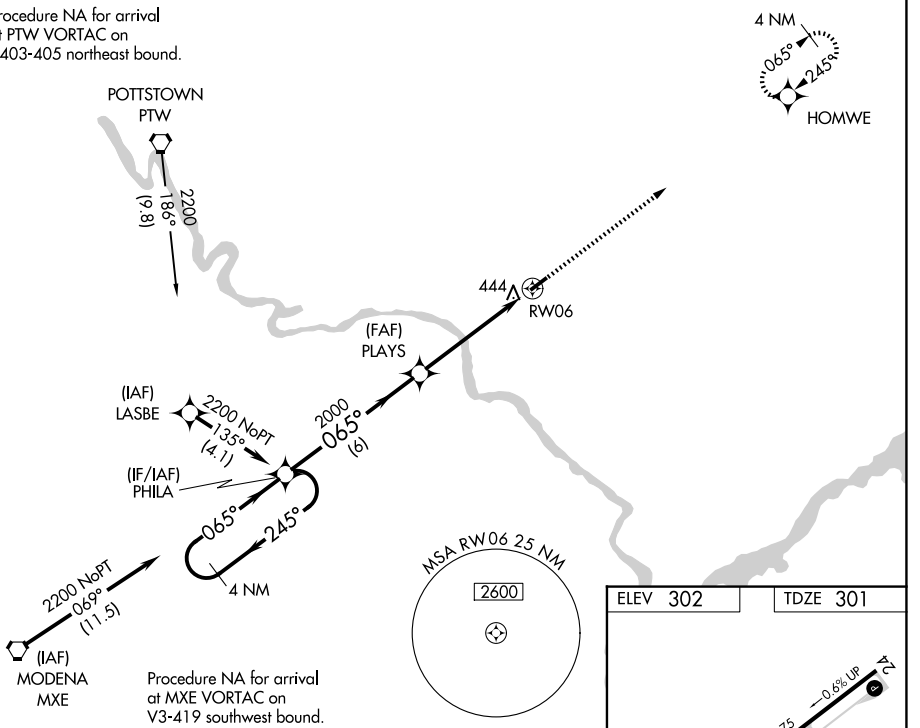

Procedure NA for arrival at MXE VORTAC on V3-419 southwest bound.

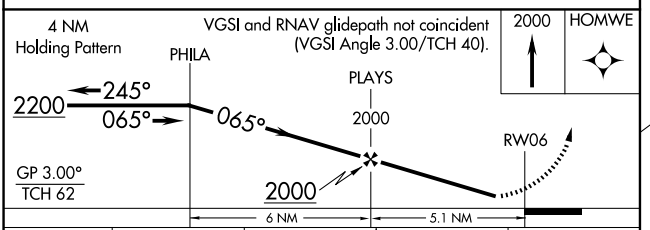

CATEGORY	A	B	C	D
LPV DA	614-1	313 (400-1)	NA	
LNAV/VNAV DA	788-1¾	487 (500-1¾)	NA	
LNAV MDA	720-1	419 (500-1)	NA	
CIRCLING	780-1	478 (500-1)	NA	

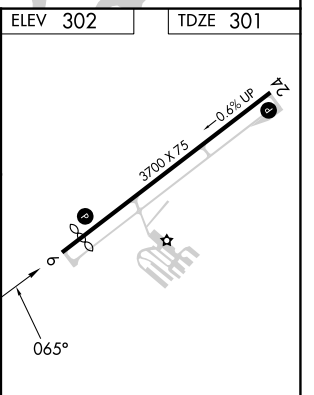

REIL Rwys 6 and 24 L
MIRL Rwy 6-24 L

NE-4, 06 AUG 2026 to 03 SEP 2026
NE-4, 06 AUG 2026 to 03 SEP 2026