

WAAS
CH **50301**
W25A

APP CRS
246°

Rwy Ldg
TDZE
Apt Elev

5500
515
529

RNAV (GPS) RWY 25

AIKEN RGNL (AIK)

RNP APCH.

▼

▲ NA

Baro-VNAV NA when using Augusta Rgnl at Bush Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 40°C. VDP NA with Augusta Rgnl at Bush Fld altimeter setting. When local altimeter setting not received, use Augusta Rgnl at Bush Fld altimeter setting: increase LPV all Cats DA to 869 feet, LNAV/VNAV all Cats DA to 927 feet and all visibilities ¾ mile; increase all MDA 120 feet and Cat C/D visibilities ¼ mile. For inop ODALS, increase LPV all Cats visibility to ¾ mile, LNAV/VNAV all Cats to 1½ mile and LNAV Cat C/D to 1¼ mile. For inop ODALS when using Augusta Rgnl at Bush Fld altimeter setting, increase LPV all Cats visibility to 1¼ mile, LNAV/VNAV all Cats to 1½ mile and LNAV Cat D to 1¾ mile.


ODALS

MISSED APPROACH:
Climb to 3000 direct
VIXLY and hold.

AWOS-3PT
118.025

AUGUSTA APP CON★
119.15 284.625

UNICOM
122.8 (CTAF)

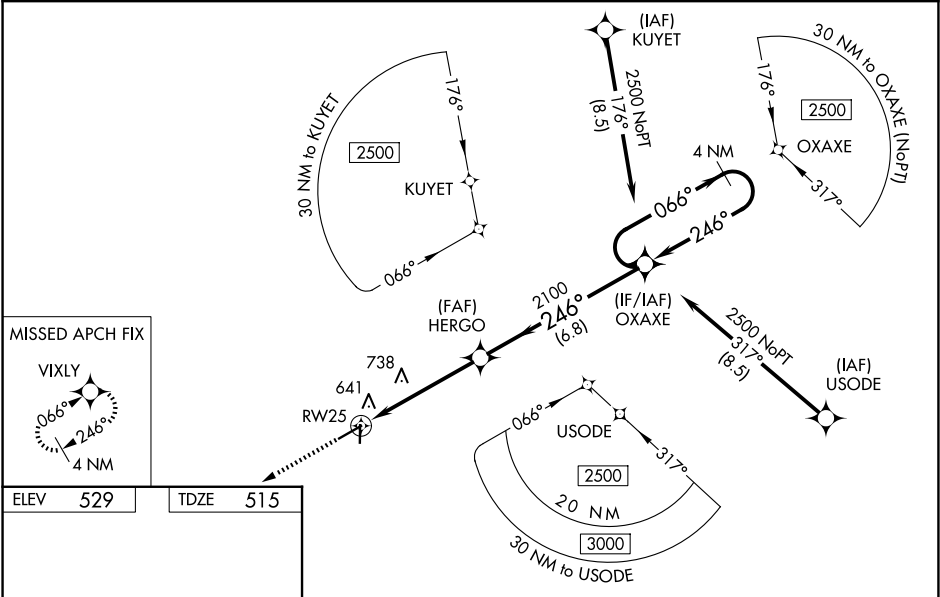

ELEV 529

TDZE 515

REIL Rwy 25

MIRL Rwy 7-25

3000

VIXLY

VGSi and RNAV glidepath not coincident
(VGSi Angle 3.00/TCH 27).

4 NM Holding Pattern

*LNAV only.

1.3 NM to RW25

3.6 NM

6.8 NM

OXAXE

2100

2100

246°

066°

2500

GP 3.00°
TCH 45

CATEGORY	A	B	C	D
LPV DA	765-¾	250 (300-¾)		
LNAV/VNAV DA	823-1	308 (300-1)		
LNAV MDA	940-¾	425 (500-¾)	940-1½	425 (500-1½)