


WAAS CH 90301 W07A	APP CRS 066°	Rwy Ldg TDZE Apt Elev	5500 515 529
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 7
AIKEN RGNL (AIK)

V Baro-VNAV NA when using Augusta Rgnl at Bush Fld altimeter setting. For uncompensated Baro-VNAV NA systems, UNAV/VNAV NA below -16°C (4°F) or above 40°C (104°F). DME/DME RNP-0.3 NA. VDP NA with Augusta Rgnl at Bush Fld altimeter setting. When local altimeter setting not received, use Augusta Rgnl at Bush Fld altimeter setting: increase LPV all Cats DAs to 819 feet and all Cats visibility ¼ SM, increase UNAV/VNAV all Cats DAs to 890 feet and all Cats visibility ½ SM; increase all MDAs 120 feet and UNAV Cats C/D visibility ½ SM and Circling Cat C visibility ¼ SM. Circling Rwy 1, 19 NA at night.	MISSED APPROACH: Climb to 2500 direct OXAXE and hold.
---	---


AWOS-3PT 118.025	AUGUSTA APP CON★ 119.15 284.625	UNICOM 122.8 (CTAF) L
----------------------------	---	---------------------------------

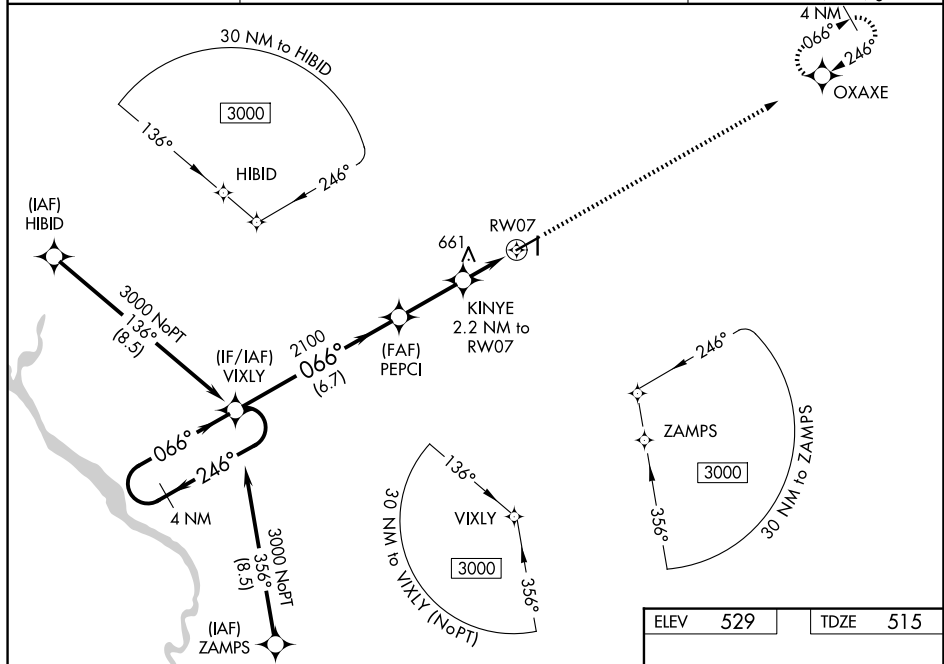

ELEV	529		TDZE	515
------	-----	--	------	-----

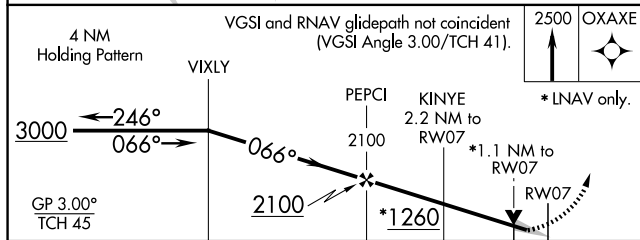

CATEGORY		A	B	C	D
LPV	DA	715- ³ / ₄ 200 (200- ³ / ₄)			
RNAV/ VNAV	DA	786- ⁷ / ₈ 271 (300- ⁷ / ₈)			
RNAV	MDA	920-1 405 (400-1)		920-1 ¹ / ₈ 405 (400-1 ¹ / ₈)	
CIRCLING		980-1 451 (500-1)	1000-1 471 (500-1)	1140-1 ³ / ₄ 611 (700-1 ³ / ₄)	1420-3 891 (900-3)

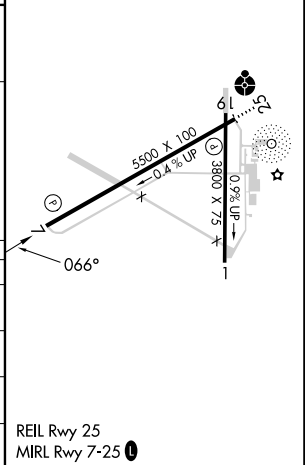

RNAV (GPS) RWY 7