

LOC/DME I-ANE
111.15
Chan **48 (Y)**

APP CRS
269°

Rwy Ldg
TDZE **910**
Apt Elev **912**

ILS or LOC RWY 27

ANOKA COUNTY/BLAINE (JANES FLD) (ANE)


DME required. RADAR required for procedure entry at BLAYN.

VDP NA when using Crystal altimeter setting. When local altimeter setting not received, use Crystal altimeter setting and increase S-ILS 27 DA to 1131 feet; increase all MDAs 40 feet and S-LOC 27 visibility Cat C/D ¼ SM, and Circling visibility Cat D ¼ SM. For inop ALS when using Crystal altimeter setting, increase S-LOC 27 Cat C/D visibility to 1 ½ SM.

MALSR

MISSED APPROACH: Climb to 2700 direct GEP VORTAC and hold, continue climb-in-hold to 2700.

ATIS 120.625	MINNEAPOLIS APP CON 126.5 335.65	ANOKA TOWER★ 132.4 (CTAF) 0	GND CON 121.85	UNICOM 122.95
------------------------	--	---------------------------------------	--------------------------	-------------------------

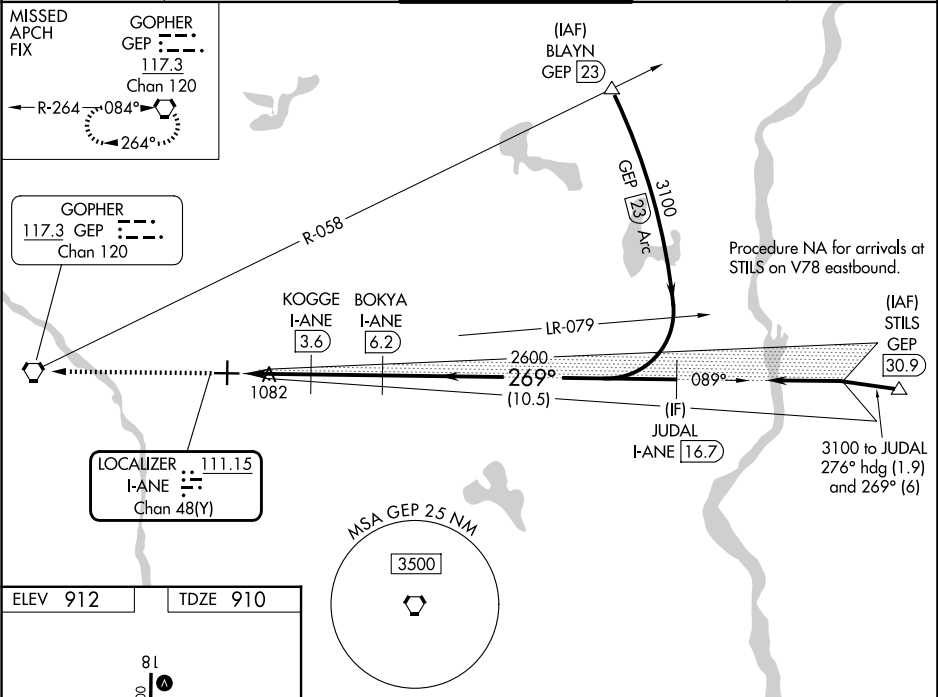

ELEV 912 TDZE 910

81
4855 X 100
5000 X 100
36
269°

TWR

☆

HIRL Rwy 9-27 0
MIRL Rwy 18-36 0
REIL Rwys 9, 18, and 36 0

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

2700 GEP

Use I-ANE DME when on the localizer course.

JUDAL I-ANE 16.7

BOKYA I-ANE 6.2

KOGGE I-ANE 3.6

I-ANE 2.2

I-ANE 1

1780

2600

2600

269°

3100

GS 3.00° TCH 49

1.2 NM 1.4 NM 2.6 NM 10.5 NM

CATEGORY	A	B	C	D
S-ILS 27	1110-½ 200 (200-½)			
S-LOC 27	1340-½ 430 (500-½)		1340-¾ 430 (500-¾)	
CIRCLING	1400-1 488 (500-1)		1420-1½ 508 (600-1½) 1580-2 668 (700-2)	