


WAAS CH 90223 W05A	APP CRS 055°	Rwy Ldg TDZE 5004 Apt Elev 904 921
--	------------------------	--

RNAV (GPS) RWY 5

TAYLOR COUNTY (AAS)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct DOODA and hold.
Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.	

AWOS-3 121.125	INDIANAPOLIS CENTER 124.625 353.65	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

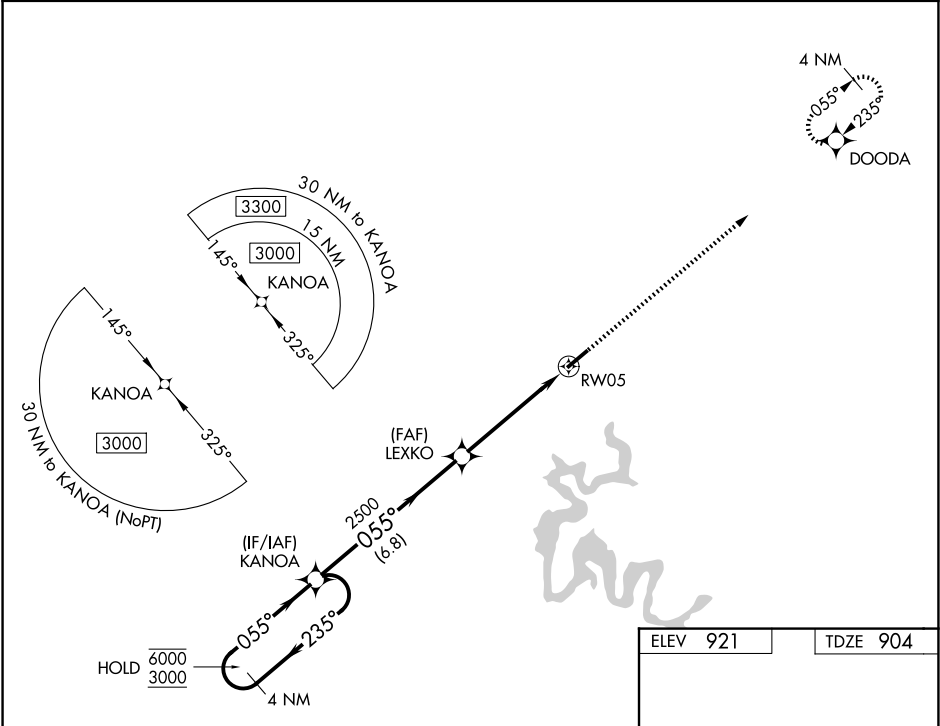

4 NM Holding Pattern		VGSi and RNAV glidepath not coincident (VGSi Angle 3.50/TCH 48).		3000	DOODA
KANOA		LEXKO			
6000 ← 235°		2500		1.1 NM to RW05	
3000 → 055°		2500		RW05	
GP 3.00°		2500		1.1 NM	
TCH 40		2500		1.1 NM	
		6.8 NM		3.9 NM	
CATEGORY	A	B	C	D	
LPV DA		1154-¾	250 (300-¾)		
LNAV/VNAV DA		1408-1⅓	504 (500-1⅓)		
LNAV MDA	1340-1	436 (500-1)	1340-1¼	436 (500-1¼)	
CIRCLING	1380-1 459 (500-1)	1400-1 479 (500-1)	1480-1½ 559 (600-1½)	1660-2¼ 739 (800-2¼)	

